


# KERA XTRA



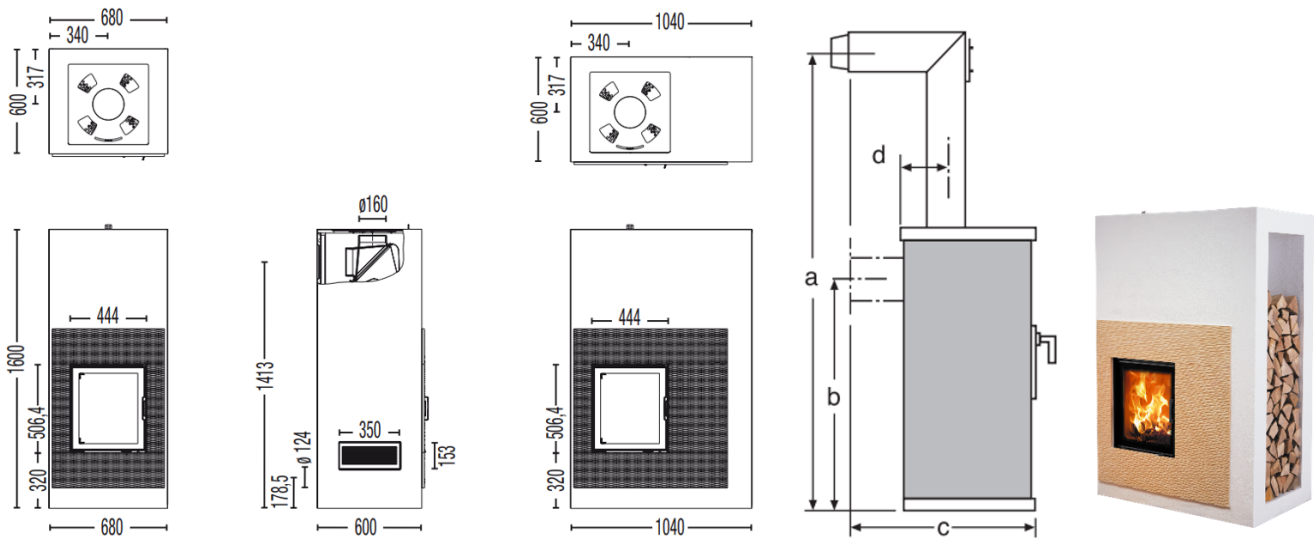

## DIMENSIONS AND WEIGHTS

|   |           |
|---|-----------|
| Height [mm]   | 1245-1445 |
| Width [mm]  | 505       |
| Depth [mm]  | 471       |
| Weight [kg]   | 95        |
| Width (body installation dimension) [mm]                                      | 450       |
| Door frame height [mm]  | 510       |
| Flue outlet diameter [mm]   | 160       |
| Insulation layer thicknesses to the installation floor [mm] (Promasil 950 KS) | 60        |
| Insulation layer thicknesses lateral / rear [mm] (Promasil 950 KS)            | 90        |
| Insulation layer thicknesses to the ceiling [mm] (Promasil 950 KS)            | 90        |
| Ceramic flues - max. length [m]   | 3         |

## HEAT OUTPUT

|   |          |
|---|----------|
| Nominal heat efficiency [kW] lt. EN test EN 13229   | 6        |
| Minimum heat output [kW] / Maximum heat output [kW]   | 3.5-8    |
| Energy efficiency category  | A+       |
| Circulating air cross-section without / with metal secondary heating surface [cm <sup>2</sup> ] | 700/1000 |

## FEATURES

|              |     |
|--------------|-----|
| Hinged doors | yes |
| Double pane  | x   |

## DATA FOR THE CHIMNEY SWEEP

|   |      |
|---|------|
| Total flue gas flow [g/s]                             | 5.14 |
| Flue gas temperature [°C]                             | 354  |
| Minimum feed pressure at nominal heat efficiency [Pa] | 12   |