


BONO XTRA



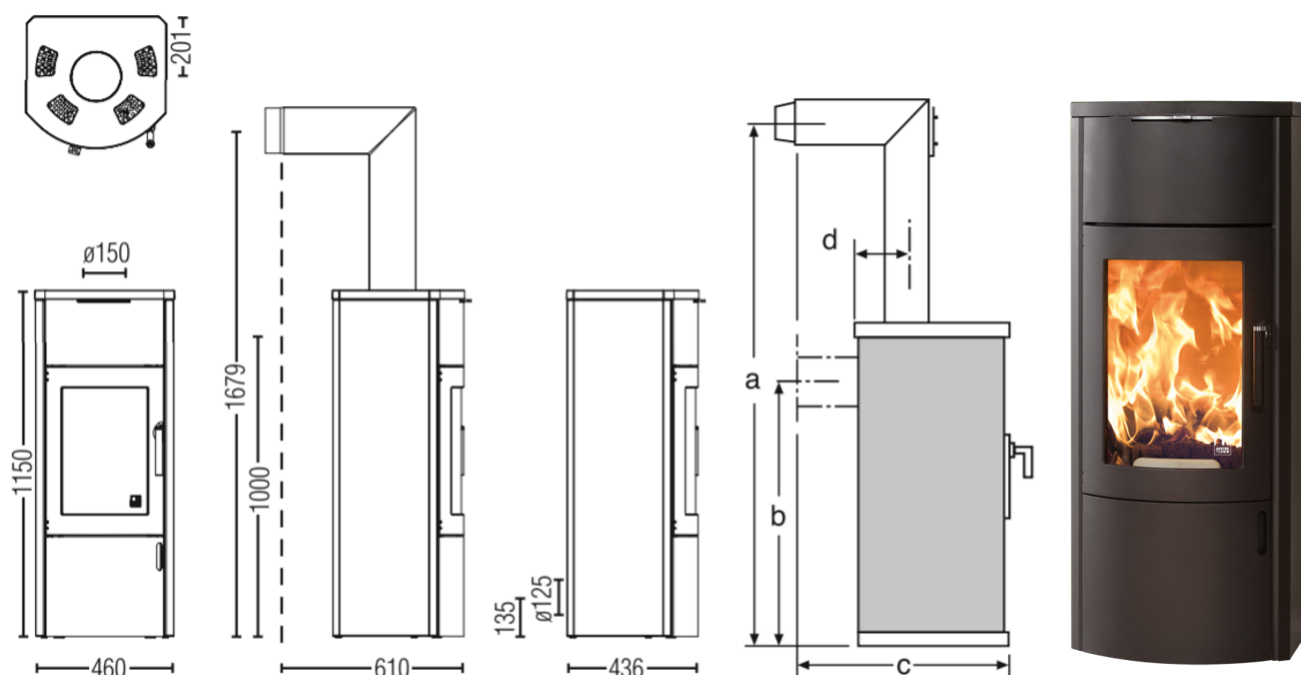

DIMENSIONS AND WEIGHTS

Steel jacket (STM) h x w x d [mm]	1150 x 460 x 435
Ceramic jacket (KMG) h x w x d [mm]	-
Soapstone jacket (SPM) h x w x d [mm]	1160 x 500 x 434
Combustion chamber (h x w x d)	510 x 257 x 260
STM / KMG / SPM weight [kg]	237 / - / 322
Flue outlet diameter [Ø mm]	150
Flue outlet diameter, middle [mm]	1000

HEAT OUTPUT

Nominal heat output under EN 13240 [kW]	5
Min. / max. heat output [kW]	2.5 / 7
Space heating capacity (depending on the building insulation)[m³]	48-124
Energy efficiency category	A

FEATURES

XTRA heat-storing technology	o
Design A1	o
Ash drawer / ash box	-
Dimensions a, b, c, d [mm]	1402 / 760 / 676 / 97
External air connection / operation independent of ambient air	behind or below

DATA FOR THE CHIMNEY SWEEP

Total flue gas flow, closed [g/s]	4.2
Flue gas temperature, closed [°C]	322
Minimum feed pressure at nominal heat efficiency, closed [Pa]	12
at 0.8 times nominal heat efficiency [Pa]	10