


# CLOU COMPACT



[www.austroflamm.com](http://www.austroflamm.com)

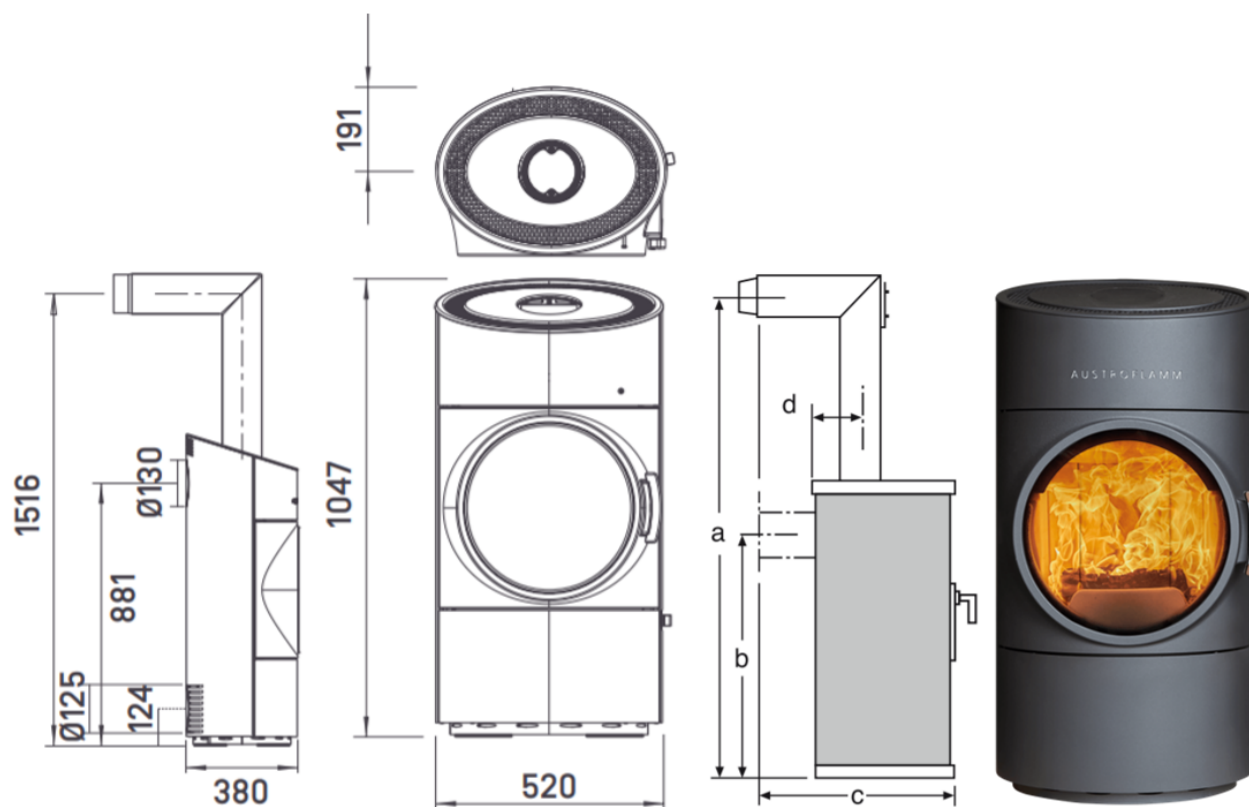

## DIMENSIONS AND WEIGHTS

Steel jacket (STM) h x w x d [mm]	1047 x 520 x 380
Ceramic jacket (KMG) h x w x d [mm]	-
Soapstone jacket (SPM) h x w x d [mm]	-
Combustion chamber (h x w x d)	349 x 328 x 225
STM / KMG / SPM weight [kg]	114 / - / -
Flue outlet diameter [Ø mm]	130
Flue outlet diameter, middle [mm]	880

## HEAT OUTPUT

Nominal heat output under EN 13240 [kW]	6
Min. / max. heat output [kW]	3.5 / 8
Space heating capacity (depending on the building insulation)[m³]	65 - 165
Energy efficiency category	A+

## FEATURES

XTRA heat-storing technology	-
Design A1	o
Ash drawer / ash box	o
Dimensions a, b, c, d [mm]	1516 / 880 / 574 / 189
external air connection / operation independent of ambient air	behind or below

## DATA FOR THE CHIMNEY SWEEP

Total flue gas flow, closed [g/s]	5.43
Flue gas temperature, closed [°C]	322
Minimum feed pressure at nominal heat efficiency, closed [Pa]	13
at 0.8 times nominal heat efficiency [Pa]	10