


SINA XTRA


AUSTROFLAMM



www.austroflamm.com

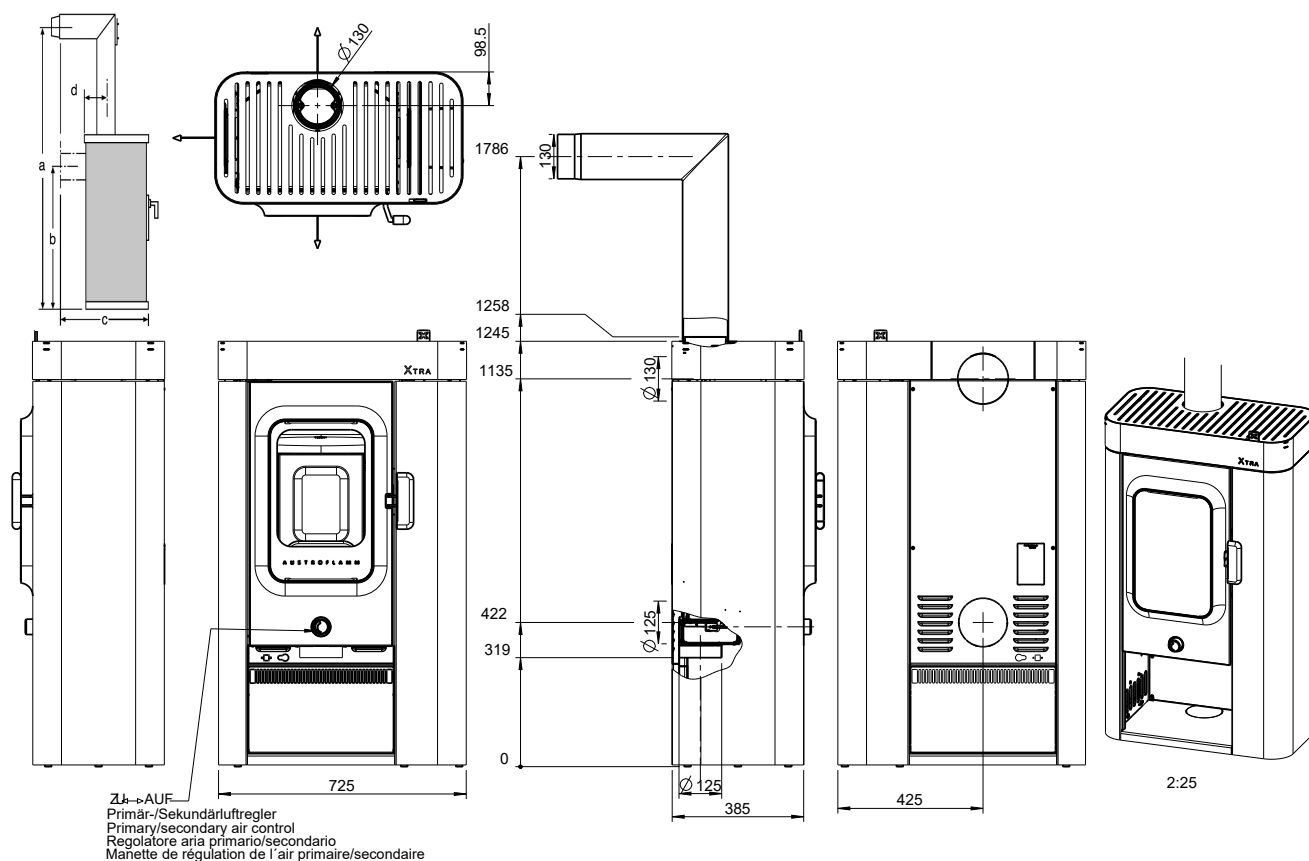

DIMENSIONS AND WEIGHTS	with Xtra
Steel casing (STM) h x w x d [mm]	1245 x 725 x 445
Ceramic casing (KMG) h x w x d [mm]	-
Soapstone casing (SPM) h x w x d [mm]	-
Firebox h x w x d [mm]	371 x 396 x 267.4
Weight STM [kg]	324
Weight of Xtra / HMS [kg]	148 / 68
Dimensions a, b, c, d [mm]	1786 / 1137 / 705 / 98.5
Flue outlet Ø [mm]	130
Flue pipe connection, middle [mm]	1135
Safety distances to combustible materials front / side / rear [mm]	1000 / 250 / 150

OUTPUT	
Nominal heat output as per EN 13240 [kW]	6.0
Heat output min. / max. [kW]	3.5 / 8.0
Room heating capacity (depending on the building insulation) [m³]	65-165
Energy efficiency category	A+

FITTINGS	
XTRA heat storage technology	o
Heat Memory System (HMS)	Z
Ash box	o
external air connection / balanced flue operation	rear or bottom

DATA FOR THE CHIMNEY SWEEP	
Exhaust gas mass flow closed [g/s]	4.4
Flue gas temperature closed [°C]	271
Minimum delivery pressure at nominal heat output closed [Pa]	12
at 0.8 times nominal heat output [Pa]	10