


# SLIM 2.0



[www.austroflamm.com](http://www.austroflamm.com)

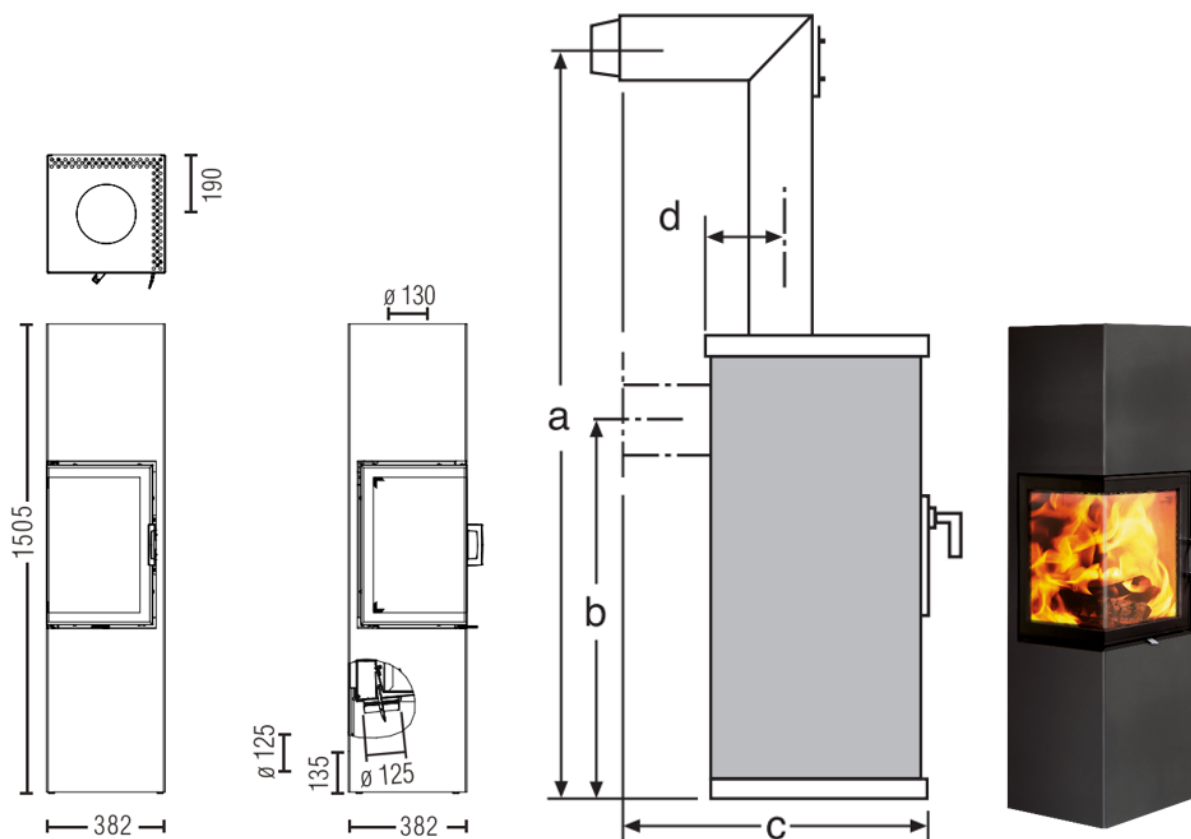

### DIMENSIONS AND WEIGHTS

Height [mm]	1505
Width [mm]	382
Depth [mm]	382
Combustion chamber (h x w x d) [mm]	550 x 262 x 252
STM weight [kg]	142
Flue outlet diameter [mm]	130
Flue outlet diameter, middle [mm]	1380

### HEAT OUTPUT

Nominal heat output under EN 13240 [kW]	5
Min. / max. heat output [kW]	3 / 7
Space heating capacity (depending on the building insulation)[m³]	48 - 124
Energy efficiency category	A+

### FEATURES

XTRA heat-storing technology	-
Design A1	o
Ash drawer / ash box	o
Dimensions a, b, c, d [mm]	2060 / 1380 / 562 / 190
external air connection / operation independent of ambient air	behind or below

### DATA FOR THE CHIMNEY SWEEP

Total flue gas flow, closed [g/s]	5.8
Flue gas temperature, closed [°C]	237
Minimum feed pressure at nominal heat efficiency, closed [Pa]	12
at 0.8 times nominal heat efficiency [Pa]	10