




64X33X51-S3-2.0

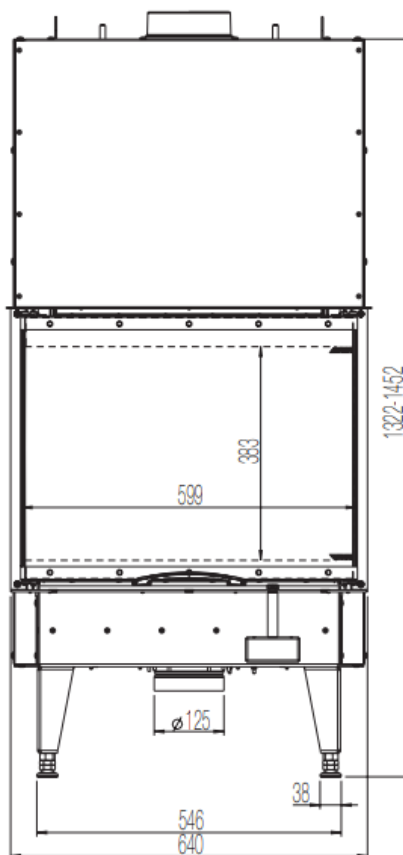

www.austroflamm.com

64X33X51-S3-2.0

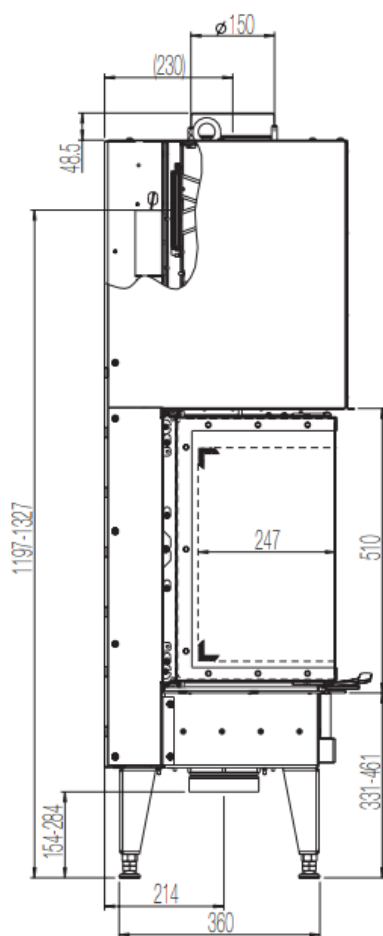

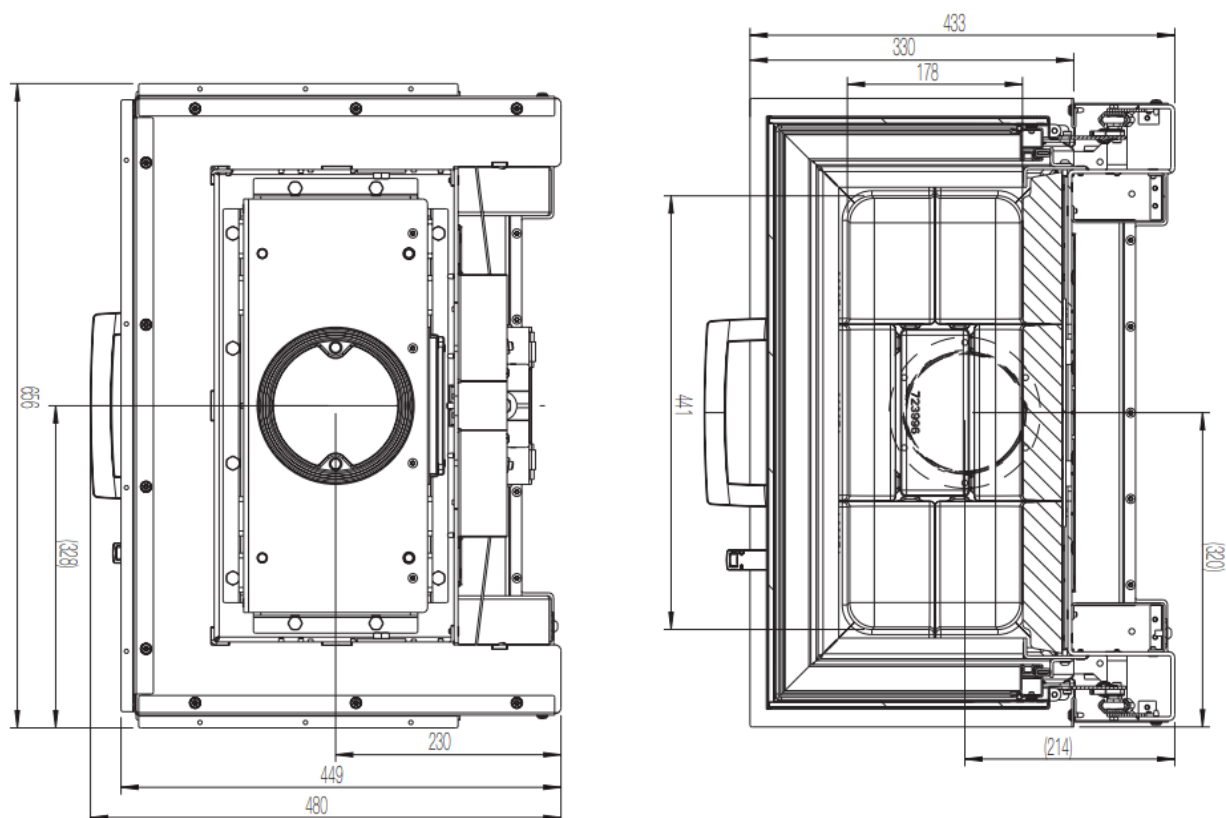

DIMENSIONS AND WEIGHTS

Height [mm]	1371-1509
Width [mm]	656
Depth [mm]	449
Weight [kg]	199
Width (body installation dimension) [mm]	640
Door frame height [mm]	510
Flue outlet diameter [mm]	150
Insulation layer thicknesses to the installation floor [mm] (Promasil 950 KS)	0
Insulation layer thicknesses lateral / rear [mm] (Promasil 950 KS)	0/60
Insulation layer thicknesses to the ceiling [mm] (Promasil 950 KS)	120
Ceramic flues - max. length [m]	x

HEAT OUTPUT

Nominal heat efficiency [kW] lt. EN test EN 13229	10
Minimum heat output [kW] / Maximum heat output [kW]	5-14
Energy efficiency category	A
Circulating air cross-section without / with metal secondary heating surface [cm ²]	700

FEATURES

Double pane	x
Sliding door	yes

DATA FOR THE CHIMNEY SWEEP

Total flue gas flow [g/s]	11.86
Flue gas temperature [°C]	261
Minimum feed pressure at nominal heat efficiency [Pa]	12