

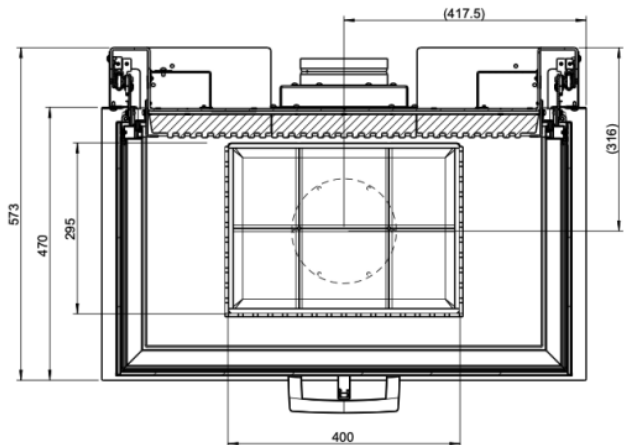
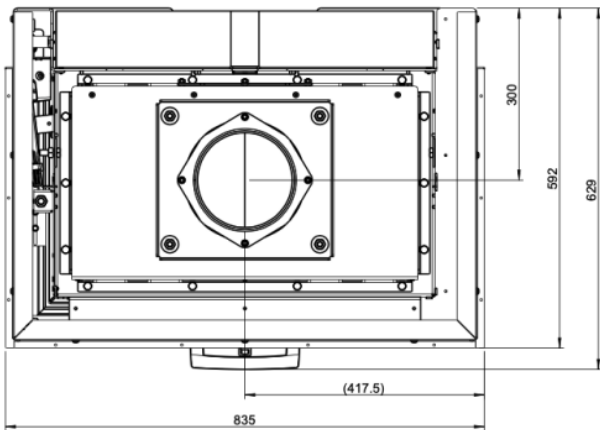


# VUUR-DRIE-80

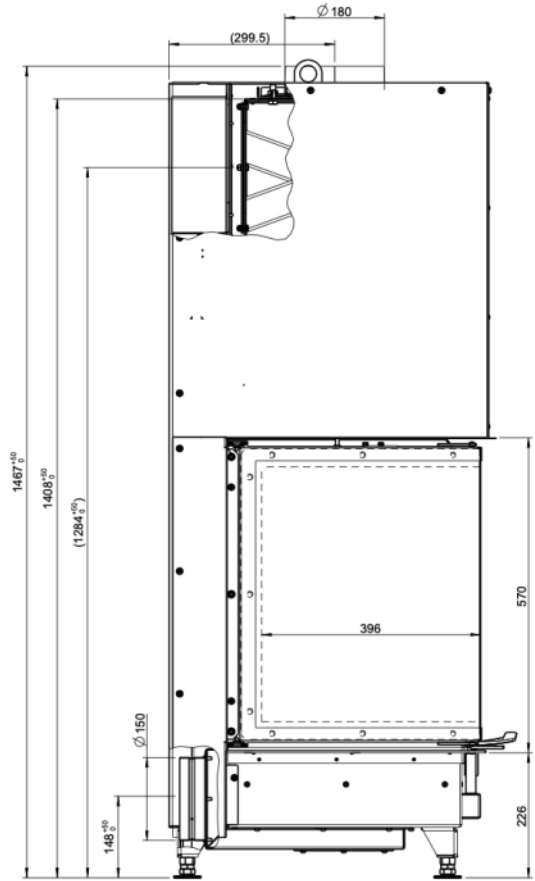

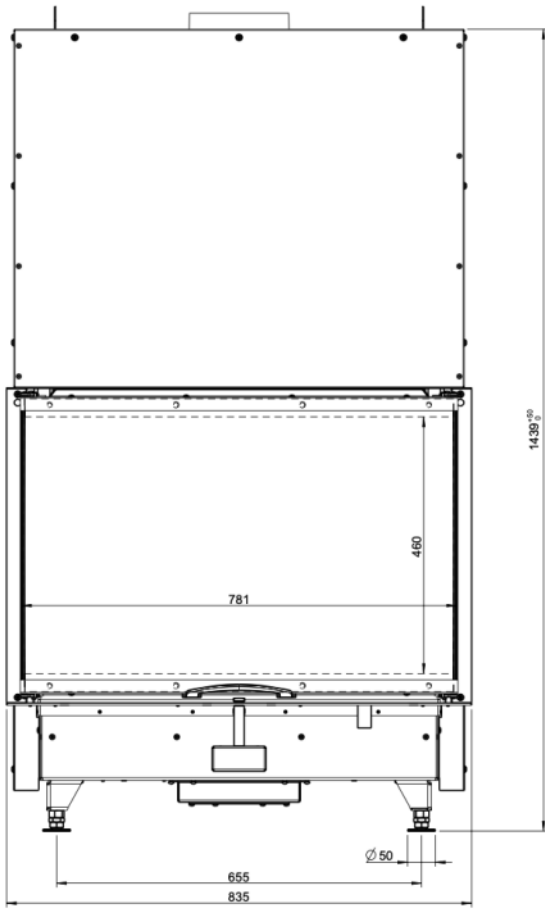

## DIMENSIONS AND WEIGHTS

Height [mm]	1467-1517
Width [mm]	835
Depth [mm]	592
Weight [kg]	312
Width (body installation dimension) [mm]	835
Door frame height [mm]	570
Flue outlet diameter [mm]	180
Insulation layer thicknesses to the installation floor [mm] (Promasil 950 KS)	0
Insulation layer thicknesses lateral / rear [mm] (Promasil 950 KS)	0/60
Insulation layer thicknesses to the ceiling [mm] (Promasil 950 KS)	0
Ceramic flues - max. length [m]	-

## HEAT OUTPUT

Nominal heat efficiency [kW] lt. EN test EN 13229	15
Minimum heat output [kW] / Maximum heat output [kW]	7.5-18
Energy efficiency category	A+
Combustion air requirement [m <sup>3</sup> /h]	43.2
Circulating air cross-section without / with metal secondary heating surface [cm <sup>2</sup> ]	700/-
Hypocausts according to technical regulations	yes

## FEATURES

Sliding door	yes
--------------	-----

## DATA FOR THE CHIMNEY SWEEP

Total flue gas flow [g/s]	14.8
Flue gas temperature [°C]	254
Minimum feed pressure at nominal heat efficiency [Pa]	13