


CLOU COMPACT PELLET



www.austroflamm.com

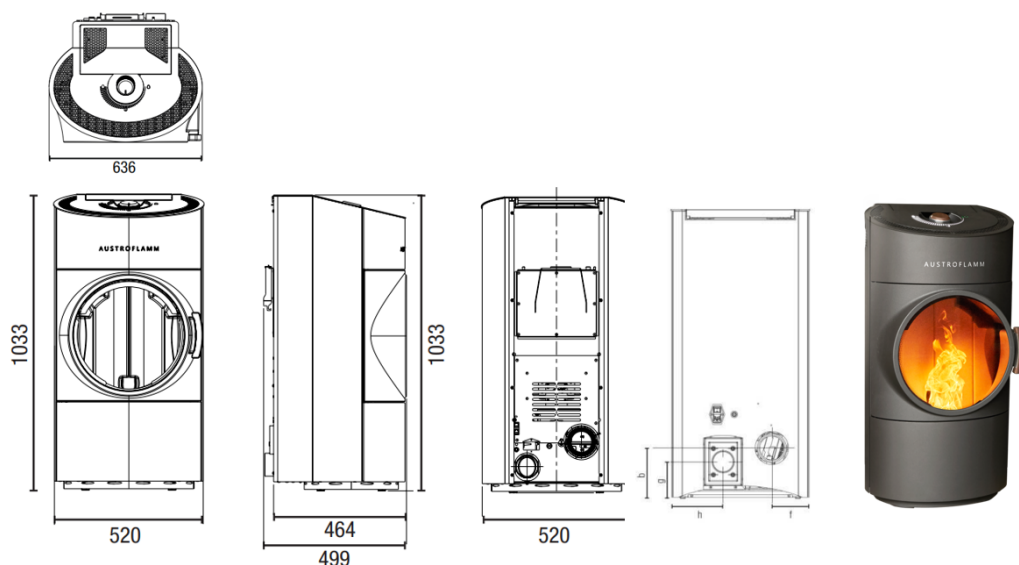

DIMENSIONS AND WEIGHTS

Height [mm]	1033
Width [mm]	520
Depth [mm]	499
Flue outlet diameter [mm]	80
External air connection [Ø mm]	80
Weight [kg]	150
b: Connection height with flue rear [mm]	178
f: Flue connection from right [mm]	260
g: Connection heat external air [mm]	92
h: External air connection from left [mm]	157

HEAT OUTPUT

Nominal heat efficiency [kW] lt. EN 13240	6
Min / max heat output [kW]	2-6
Min / max space heating capacity [m³]	65-165
Pellet hopper [kg/l]	≈ 26/40
Min / max fuel consumption [kg/h]	0.5-1.55
Min / max burning time [h]	≈ 16 - 52

FEATURES

Room thermostat	o
(Weekly) timer	-
Automatic grate	-
Independent of ambient air	o
Power connection [V/Hz]	230/50
WLAN	Z
Remote control	-
Convection module	-

DATA FOR THE CHIMNEY SWEEP

Total flue gas flow [g/s] geschlossen	5.0
Flue gas temperature [°C] geschlossen	164
Minimum feed pressure at nominal heat efficiency [Pa] geschlossen	12
Minimum feed pressure for chimney calculation [Pa]	3