

63X40X42-K-2.0



AUSTROFLAMM




www.austroflamm.com

63X40X42-K-2.0



AUSTROFLAMM

left

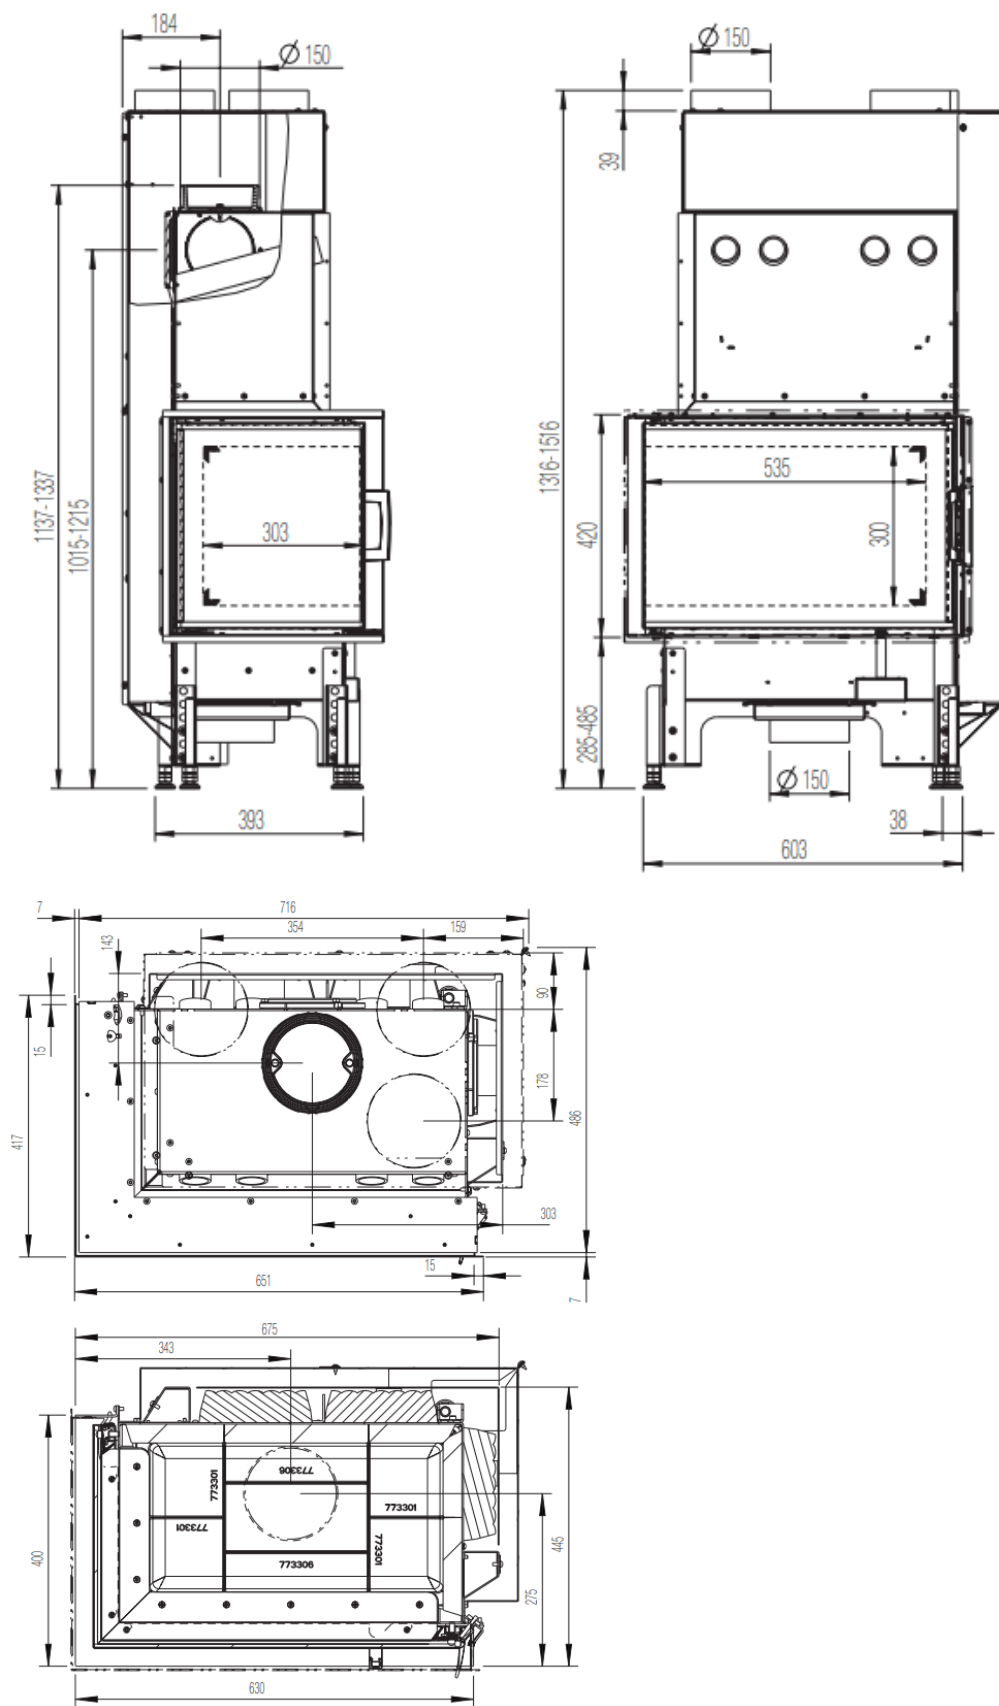


right

o standard

Z Accessories

- not available

63X40X42-K-2.0

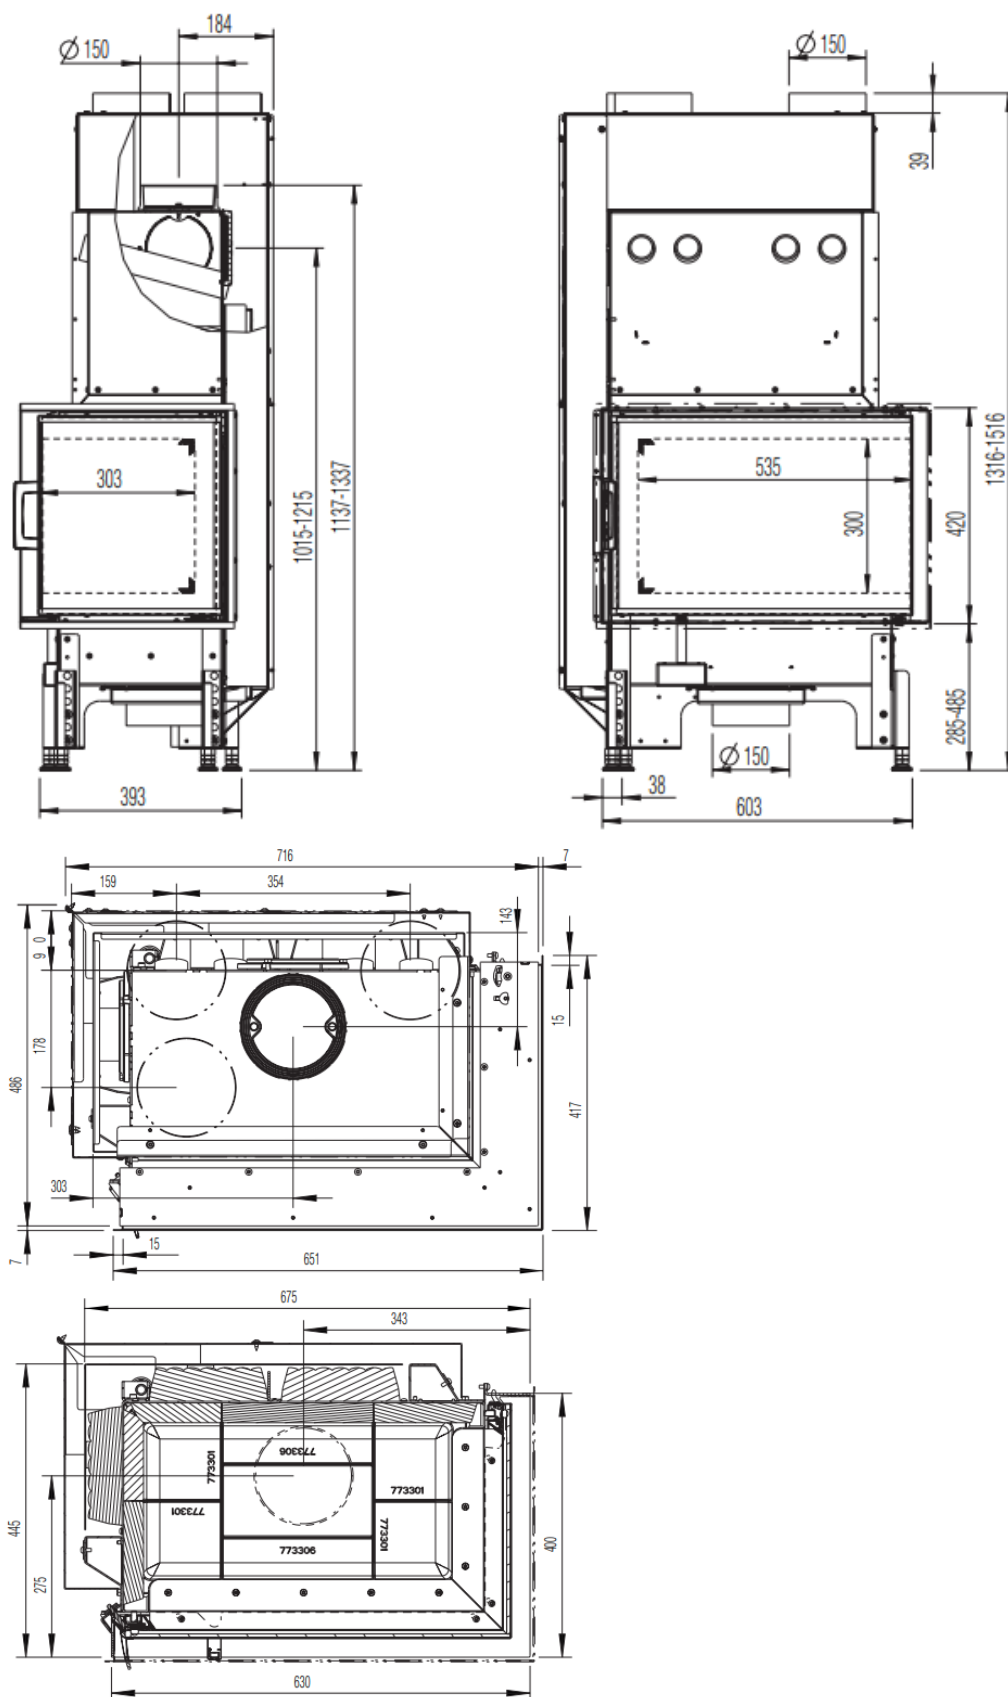

o standard

Z Accessories

- not available

DIMENSIONS AND WEIGHTS	
Height [mm]	1137-1337
Width [mm]	675
Depth [mm]	445
Weight [kg]	126
Width (body installation dimension) [mm]	630
Door frame, height [mm]	420
Flue pipe outlet, diameter [mm]	150
Insulation layer thicknesses to the installation floor [mm] (Promasil 950 KS)	100
Insulation layer thicknesses lateral / rear [mm] (Promasil 950 KS)	120
Insulation layer thicknesses to the ceiling [mm] (Promasil 950 KS)	120
Ceramic flues - max. length [m]	4
HEAT OUTPUT	
Nominal heat efficiency [kW] lt. EN test EN 13229	8
Heat output, minimum [kW] / Maximum heat output [kW]	4-11
Energy efficiency category	A+
Circulating air cross-section without / with metal secondary heating surface [cm ²]	700/1300
FEATURES	
Hinged doors	yes
Double pane	x
DATA FOR THE CHIMNEY SWEEP	
Total flue gas flow [g/s]	7.65
Flue gas temperature [°C]	230
Minimum feed pressure at nominal heat efficiency [Pa]	10