

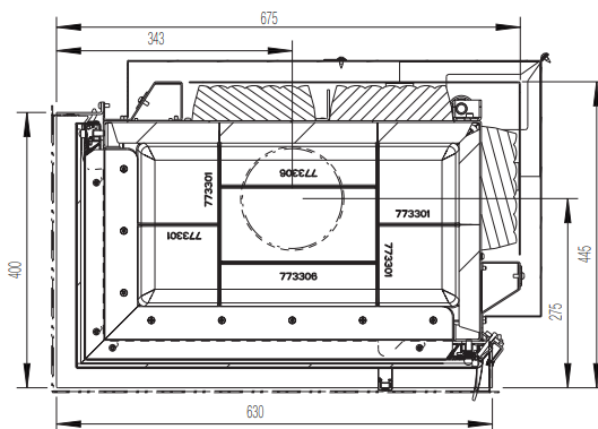
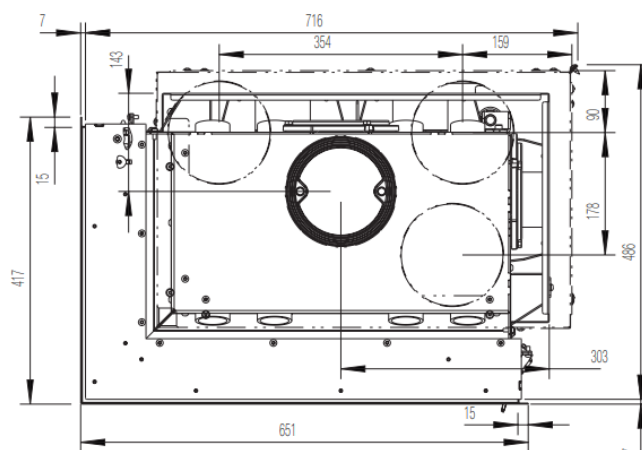


63X40X42-K-2.0 L + R




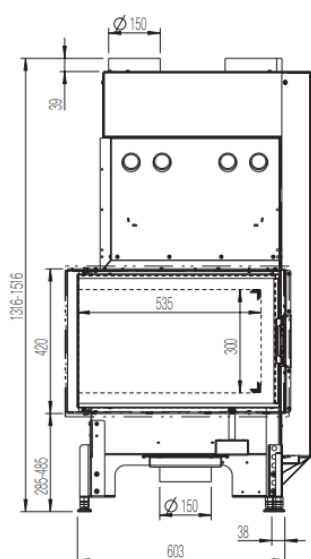


www.austroflamm.com

left

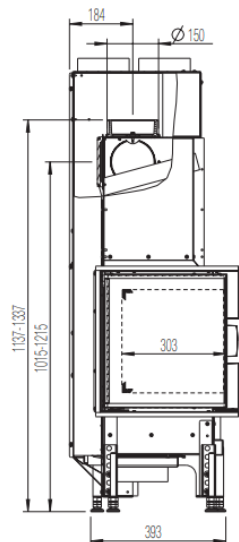

right

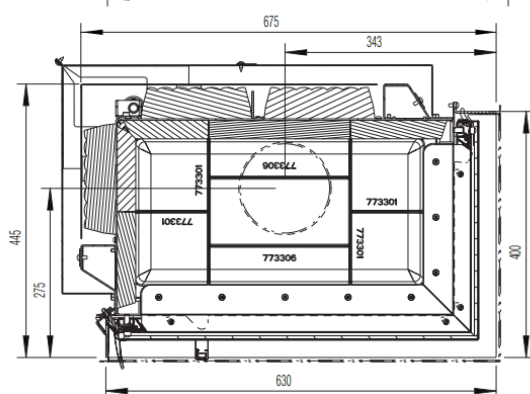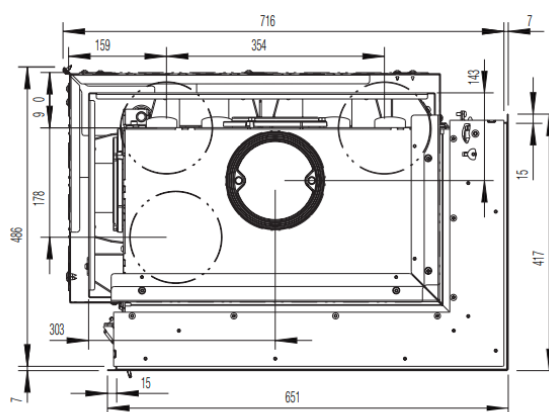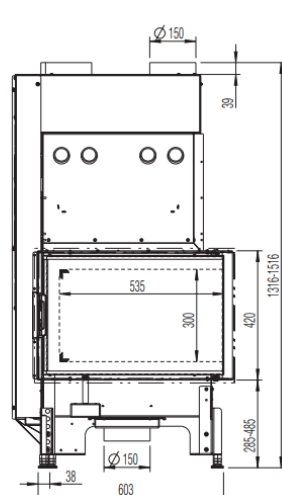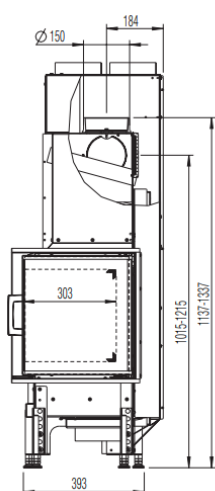

Dimensions and weight	
Height from [mm]	1133
Height to [mm]	1253
Width (body installation dimension) [mm]	634
Depth [mm]	445
Door frame height [mm]	420
Door frame width [mm]	634
Weight, basic appliance [kg]	-
Weight, HMS [kg]	39
Combustion chamber height [mm]	358
Combustion chamber width [mm]	468
Combustion chamber depth [mm]	238
Flue pipe outlet, diameter [mm]	150
Minimum distance to combustible materials - distance to rear dR [mm]	0/0
Minimum distance to combustible materials - left side dS_1 [mm]	0/0
Minimum distance to combustible materials - right side dS_2 [mm]	160/160
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1100/1100
Minimum distance to combustible materials - floor in front dF [mm]	0/0
Minimum distance to combustible materials - bottom dB [mm]	70/70
Minimum distance to combustible materials - left side radiation area dL_1 [mm]	0/0
Minimum distance to combustible materials - right side radiation area dL_2 [mm]	0/0
Minimum distance to combustible materials - distance to ceiling dC [mm]	750/750
Safety distance to insulation, ceiling [mm]	400/400
Safety distance to insulation, left [mm]	60/60
Safety distance to insulation, rear [mm]	60/60
Safety distance to insulation, right [mm]	-/-
Safety distance to insulation, floor [mm]	70/70
Insulation material thickness to installation base [mm]	0/0
Insulation material thickness to ceiling [mm]	120/120
Minimum distance from non-flammable materials [mm]	50/50
Insulation material, left [mm]	100/100
Insulation material thickness, right [mm]	-/-
Insulation material, rear [mm]	120/120
Cross-section, convection outlet [cm²]	750/750
Cross-section, convection inlet [cm²]	730/730
Max. amount of firewood fuel to be deposited [kg]	1,8/ 1.8
Output	
Nominal heat efficiency [kW]	8.0/8.0
Minimum heat output [kW]	-/-
Maximum heat output [kW]	8.0/8.0
Energy efficiency class	A+/A+
Circulating air cross-section with metal heat recovery surface [cm²]	730/730
Circulating air cross-section without metal heat recovery surface [cm²]	730/730
Combustion air requirement [m³/h]	44/44
Minimum fuel throughput [kg/h]	-/-
Maximum fuel throughput [kg/h]	2.3/2.3
Outside air connection diameter [Ø mm]	150

Equipment	
Hinged door	Yes
Sliding door	No
Double pane	No
Pane curvature	Flat
Opening mechanism	Folding
Balanced flue - DiBt (German Institute for Structural Engineering)	Yes
Heat Memory System	Accessories
Hypocaust in compliance with technical regulations	Yes
Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	7.7/7.7
Flue gas temperature [°C]	230/230
Minimum delivery pressure at nominal heat output [Pa]	10/10