


CLOU XTRA 2.0



[www.austroflamm.com](http://www.austroflamm.com)

# CLOU XTRA 2.0

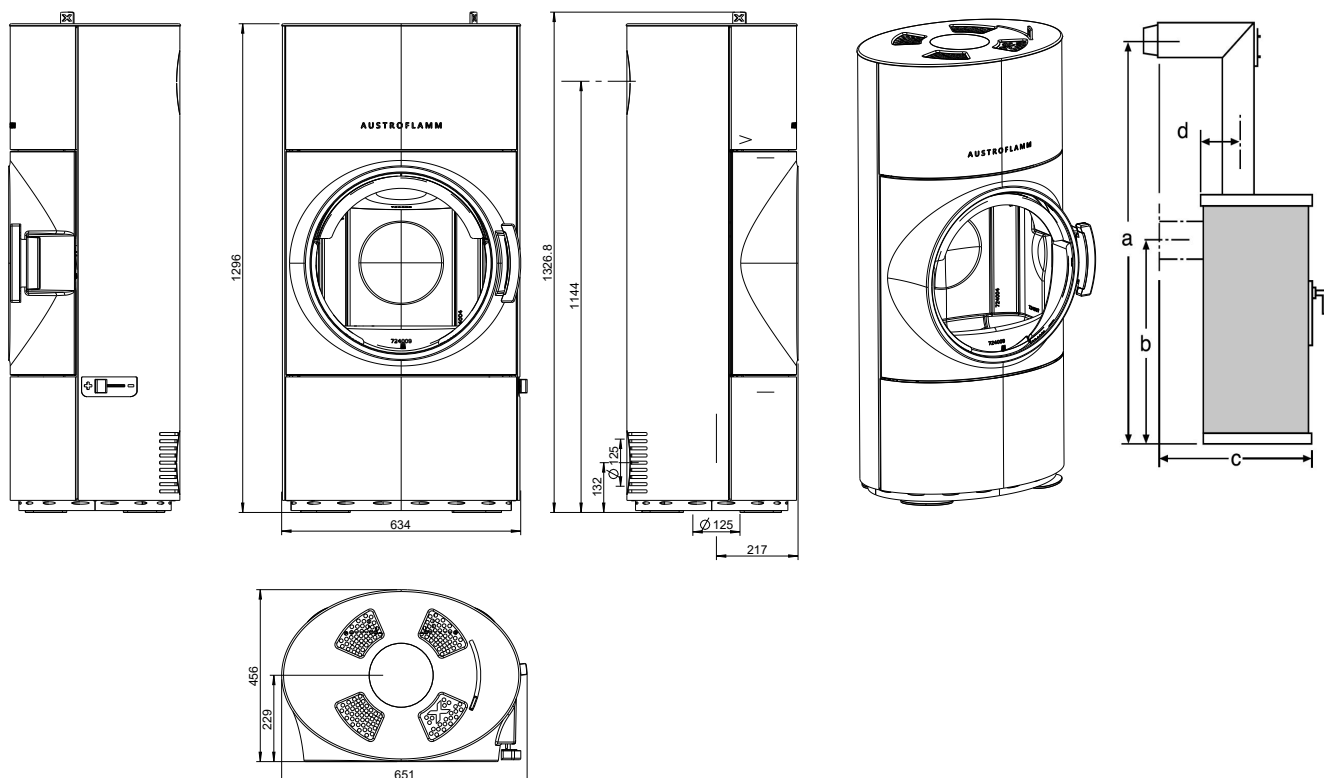

## DIMENSIONS AND WEIGHTS

Steel casing (STM) h x w x d [mm]	1296 x 630 x 450
Ceramic casing (KMG) h x w x d [mm]	-
Soapstone casing (SPM) h x w x d [mm]	-
Firebox h x w x d [mm]	389 x 432 x 245
Weight STM / KMG / SPM [kg]	273 / - / -
Weight Xtra [kg]	120
Flue pipe outlet [Ø mm]	150
Flue pipe connection, middle [mm]	1144
Dimensions a, b, c, d [mm]	1813 / 1144 / 598 / 227
Safety distances to combustibile materials front / side / rear [mm]	1100 / 420 / 200

## OUTPUT

Nominal heat efficiency as per EN 13240 [kW]	8
Heat output min. / max. [kW]	4 / 11
Room heating capacity (depending on the building insulation) [m <sup>3</sup> ]	98-255
Energy efficiency class	A

## FITTINGS

XTRA heat storage technology	o
Heat Memory System	-
Ash box	o
external air connection / balanced flue operation	rear or bottom

## DATA FOR THE CHIMNEY SWEEP

Total flue gas flow, closed [g/s]	6.6
Flue gas temperature, closed [°C]	357
Minimum feed pressure at nominal heat efficiency, closed [Pa]	12
at 0.8 times nominal heat efficiency [Pa]	10