


HEIDI BACK



[www.austroflamm.com](http://www.austroflamm.com)

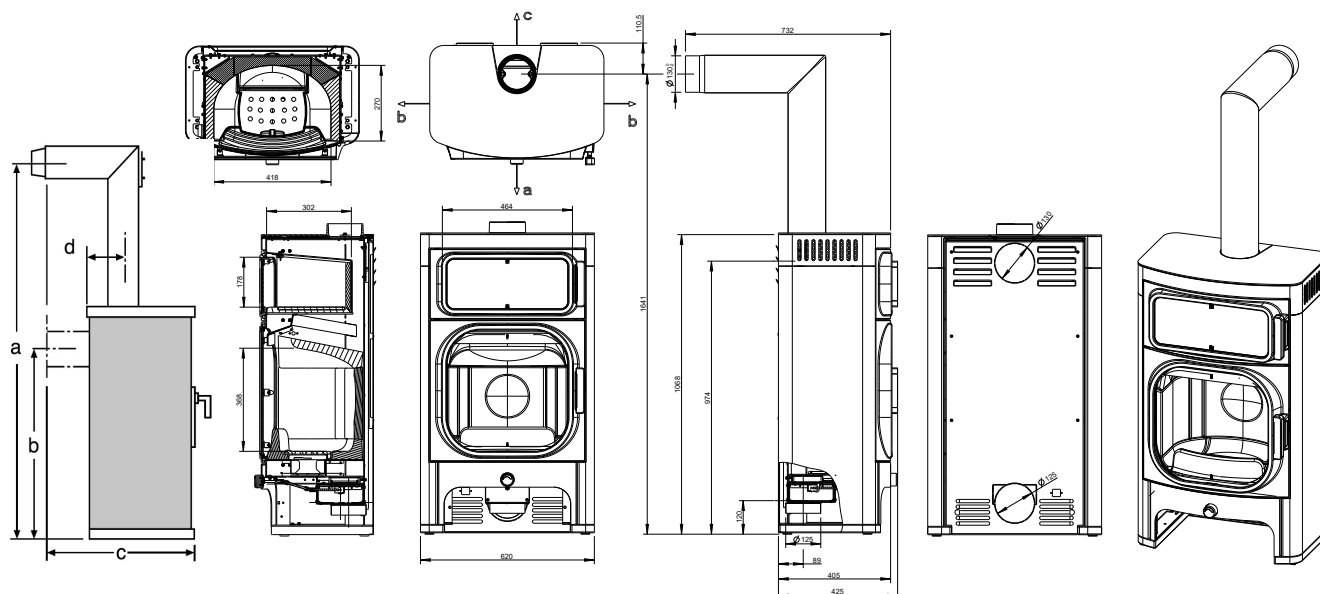

### DIMENSIONS AND WEIGHTS

Steel casing (STM) h x w x d [mm]	1066 x 620 x 405
Ceramic casing (KMG) h x w x d [mm]	-
Soapstone casing (SPM) h x w x d [mm]	-
Firebox h x w x d [mm]	368 x 418 x 270
Weight STM [kg]	167.5
Weight HMS [kg]	68.5
Flue pipe outlet [mm]	130
Flue pipe connection, middle [mm]	974
Baking compartment h x w x d [mm]	178 x 418 x 302
Dimensions a, b, c, d [mm]	1641 / 974 / 687 / 102
Safety distances to combustible materials front / side / rear [mm]	1300 / 200 / 200

### HEAT OUTPUT

Nominal heat output under EN 13240 [kW]	7
Min. / max. heat output [kW]	3.5 / 9
Space heating capacity (depending on the building insulation)[m³]	81-210
Energy efficiency category	A+

### FITTINGS

XTRA heat storage technology	-
Heat Memory System (HMS)	Z
Ash box	o
external air connection / balanced flue operation	rear or bottom

### DATA FOR THE CHIMNEY SWEEP

Total flue gas flow, closed [g/s]	6.41
Flue gas temperature, closed [°C]	262
Minimum feed pressure at nominal heat efficiency, closed [Pa]	10
at 0.8 times nominal heat efficiency [Pa]	8