


KYLIE XTRA 2.0

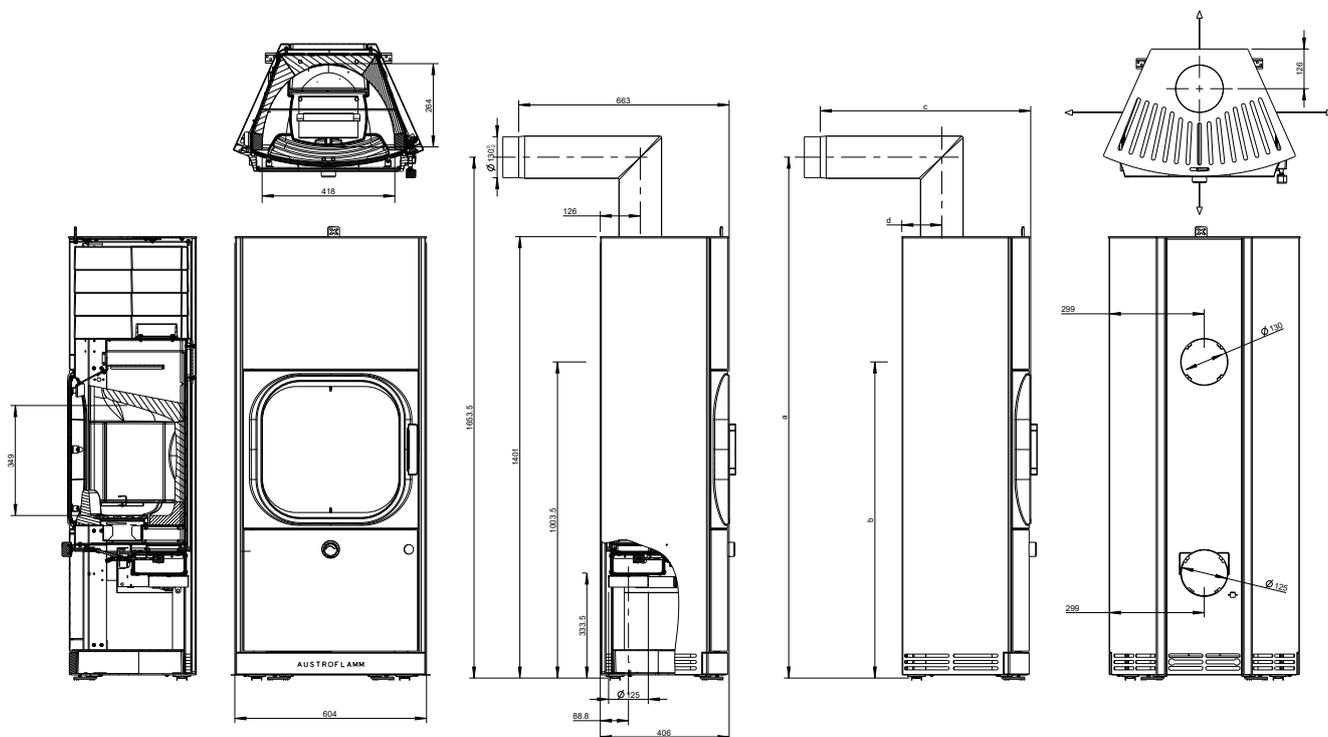

Dimensions and weight

Height [mm]	1401
Width [mm]	604
Depth [mm]	406
Combustion chamber width [mm]	418
Combustion chamber height [mm]	349
Combustion chamber depth [mm]	264
Baking compartment width [mm]	NPD
Baking compartment height [mm]	NPD
Baking compartment depth [mm]	NPD
Warming drawer, width [mm]	NPD
Warming compartment height [mm]	NPD
Warming drawer, depth [mm]	NPD
Dimensions, a (with Austroflamm elbow piece) [mm]	1654
Dimensions, b (with Austroflamm elbow piece) [mm]	1004
Dimensions, c (with Austroflamm elbow piece) [mm]	663
Dimensions, d (with Austroflamm elbow piece) [mm]	126
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	276
Weight Xtra [kg]	136
Weight, HMS [kg]	NPD
Total weight inc. steel case (STM) [kg]	276
Total weight inc. ceramic case (KGM) [kg]	NPD
Total weight inc. soapstone case (SPM) [kg]	NPD
Minimum distance to combustible materials - distance to rear dR [mm]	100/ 100
Minimum distance to combustible materials - left side dS_1 [mm]	100/ 100
Minimum distance to combustible materials - right side dS_2 [mm]	100/ 100
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	800/ 800
Minimum distance to combustible materials - floor in front dF [mm]	800/ 800
Minimum distance to combustible materials - bottom dB [mm]	0/ 0
Minimum distance to combustible materials - left side radiation area dL_1 [mm]	100/ 100
Minimum distance to combustible materials - right side radiation area dL_2 [mm]	100/ 100
Minimum distance to combustible materials - distance to ceiling dC [mm]	750/ 750
Minimum distance from non-flammable materials [mm]	50/ 50

Output

Nominal heat efficiency [kW]	7.4/ 7.4
Minimum heat output [kW]	NPD/NPD
Maximum heat output [kW]	7.4/ 7.4
Minimum room heating capacity [m³]	113/ 113
Maximum room heating capacity [m³]	150/ 150
Energy efficiency class	A+/A+
Energy efficiency index (EEI)	110/ 113
Direct heat output [kW]	7.4/ 7.4
Indirect heat output [kW]	NPD/NPD
Efficiency at nominal heat output [%]	83/ 85
Efficiency at at part load heat output [%]	NPD/NPD

Data for the chimney sweep

Flue gas mass flow at nominal heat output [g/s]	4.8/ 5.3
Flue gas temperature [°C]	297/ 239
Minimum delivery pressure at nominal heat output [Pa]	12/ 12
at 0.8 times nominal heat output [Pa]	10/ 10

- not available

Equipment

Xtra heat storage technology	standard
Heat Memory System	-
External air connection / operation independent of ambient air	Yes
Ash removal	Ash box