


KYLIE XTRA






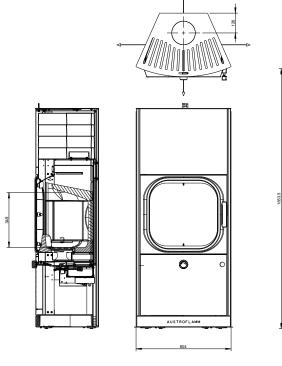







KYLIE XTRA



Dimensions and weight	
Height [mm]	1401
Width [mm]	604
Depth [mm]	406
Combustion chamber width [mm]	418
Combustion chamber height [mm]	349
Combustion chamber depth [mm]	264
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	1654
Dimensions, b (with Austroflamm elbow piece) [mm]	1004
Dimensions, c (with Austroflamm elbow piece) [mm]	663
Dimensions, d (with Austroflamm elbow piece) [mm]	126
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	276
Weight Xtra [kg]	136
Weight, HMS [kg]	-
Total weight inc. steel case (STM) [kg]	276
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
dP Radiation front [mm]	1200
dS1 Distance left [mm]	200
dR Distance rear [mm]	200
dS2 Distance right [mm]	200
dB Distance bottom [mm]	0
Minimum distance from non-flammable materials [mm]	50

Output	
Nominal heat efficiency [kW]	6.0
Minimum heat output [kW]	3.5
Maximum heat output [kW]	8.0
Minimum room heating capacity [m³]	65
Maximum room heating capacity [m³]	165
Energy efficiency class	A+

Data for the chimney sweep		
Exhaust gas mass flow [g/s]	4.67	
Flue gas temperature [°C]	297	
Minimum delivery pressure at nominal heat output [Pa]	12	
at 0.8 times nominal heat output [Pa]	10	

Equipment		
Xtra heat storage technology	Standard	
Heat Memory System	-	
External air connection / operation independent of ambient air	Yes	
Ash removal	Ash box	