


LUCA COOK



AUSTROFLAMM

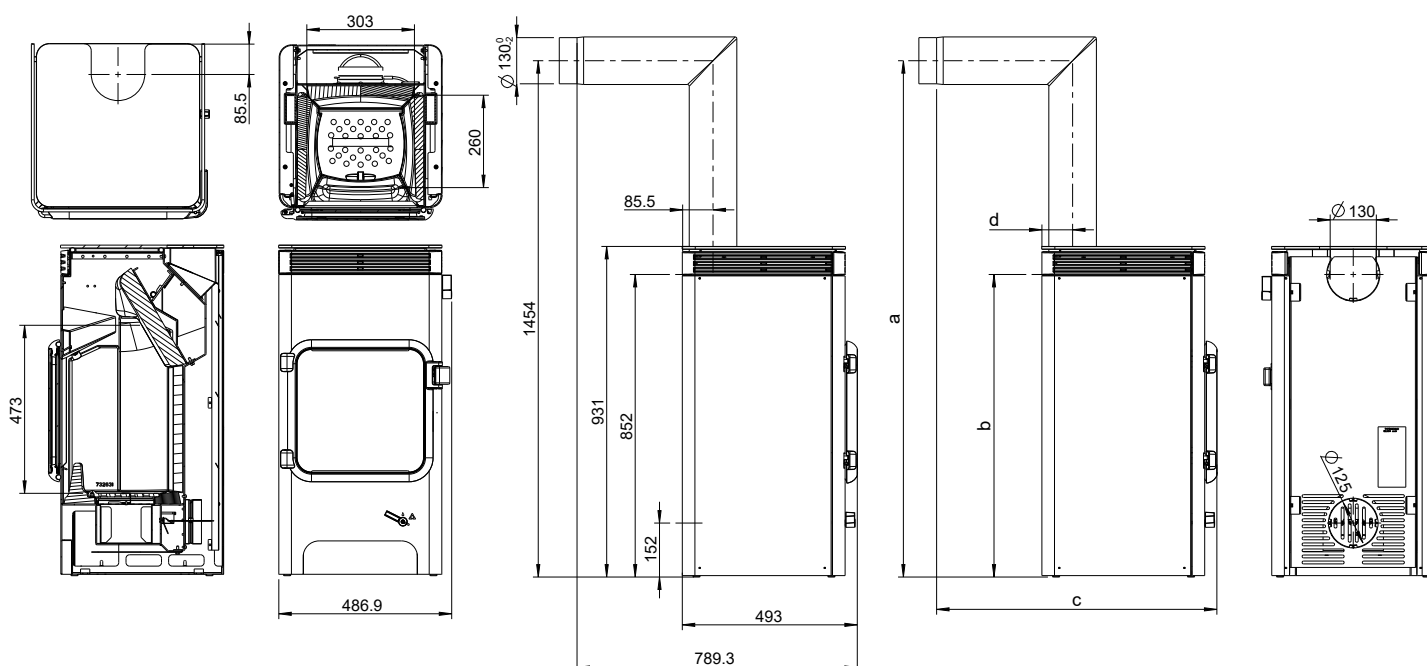

www.austroflamm.com

Dimensions and weight	
Height [mm]	931
Width [mm]	487
Depth [mm]	493
Combustion chamber width [mm]	303
Combustion chamber height [mm]	473
Combustion chamber depth [mm]	260
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	1454
Dimensions, b (with Austroflamm elbow piece) [mm]	852
Dimensions, c (with Austroflamm elbow piece) [mm]	789
Dimensions, d (with Austroflamm elbow piece) [mm]	86
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	135
Weight Xtra [kg]	-
Weight, HMS [kg]	-
Total weight inc. steel case (STM) [kg]	-
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
Minimum distance to combustible materials - distance to rear dR [mm]	350/350
Minimum distance to combustible materials - left side dS_1 [mm]	300/300
Minimum distance to combustible materials - right side dS_2 [mm]	300/300
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1000/1000
Minimum distance to combustible materials - floor in front dF [mm]	0/0
Minimum distance to combustible materials - bottom dB [mm]	0/0
Minimum distance to combustible materials - left side radiation area dL_1 [mm]	350/350
Minimum distance to combustible materials - right side radiation area dL_2 [mm]	350/350
Minimum distance to combustible materials - distance to ceiling dC [mm]	750/750
Minimum distance from non-flammable materials [mm]	50/50
Output	
Nominal heat efficiency [kW]	7.0 / 8.0
Minimum heat output [kW]	-
Maximum heat output [kW]	7.0 / 8.0
Minimum room heating capacity [m³]	82
Maximum room heating capacity [m³]	210
Energy efficiency class	A+
Equipment	
Xtra heat storage technology	-
Heat Memory System	-
External air connection / operation independent of ambient air	-
Ash removal	-
Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	6.7 / 5.9
Flue gas temperature [°C]	292 / 214
Minimum delivery pressure at nominal heat output [Pa]	12 / 11
at 0.8 times nominal heat output [Pa]	10/10

- not available