


SLIM 2.0 RIGHT



SLIM 2.0 RIGHT

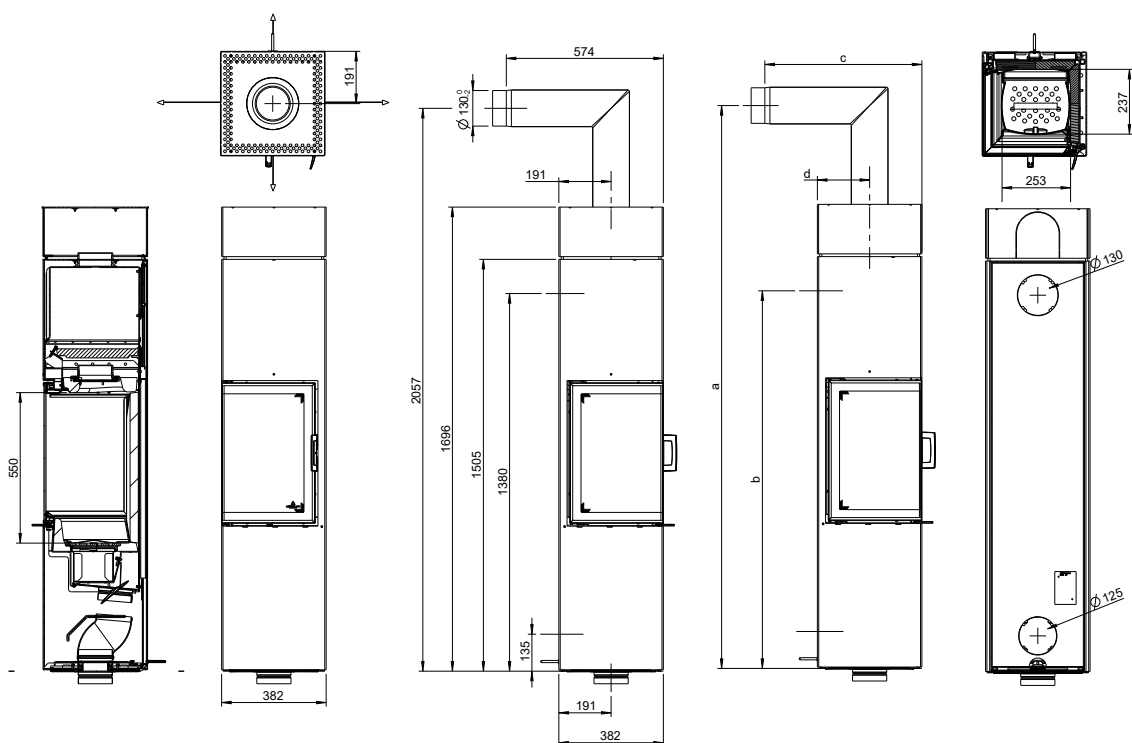

Dimensions and weight

| | |
|---|------|
| Height [mm] | 1505 |
| Width [mm] | 382 |
| Depth [mm] | 382 |
| Combustion chamber width [mm] | 253 |
| Combustion chamber height [mm] | 550 |
| Combustion chamber depth [mm] | 237 |
| Baking compartment width [mm] | - |
| Baking compartment height [mm] | - |
| Baking compartment depth [mm] | - |
| Warming drawer, width [mm] | - |
| Warming compartment height [mm] | - |
| Warming drawer, depth [mm] | - |
| Dimensions, a (with Austroflamm elbow piece) [mm] | 2057 |
| Dimensions, b (with Austroflamm elbow piece) [mm] | 1380 |
| Dimensions, c (with Austroflamm elbow piece) [mm] | 574 |
| Dimensions, d (with Austroflamm elbow piece) [mm] | 191 |
| Flue pipe outlet, diameter [mm] | 130 |
| Outside air connection diameter [Ø mm] | 125 |
| Weight, basic appliance [kg] | 139 |
| Weight Xtra [kg] | - |
| Weight, HMS [kg] | 39 |
| Total weight inc. steel case (STM) [kg] | 139 |
| Total weight inc. ceramic case (KGM) [kg] | - |
| Total weight inc. soapstone case (SPM) [kg] | - |
| dP Radiation front [mm] | 900 |
| dS1 Distance left [mm] | 230 |
| dR Distance rear [mm] | 230 |
| dS2 Distance right [mm] | 900 |
| dB Distance bottom [mm] | 0 |

Output

| | |
|------------------------------------|-----|
| Nominal heat efficiency [kW] | 5.0 |
| Minimum heat output [kW] | 3.0 |
| Maximum heat output [kW] | 7.0 |
| Minimum room heating capacity [m³] | 48 |
| Maximum room heating capacity [m³] | 124 |
| Energy efficiency class | A+ |

Data for the chimney sweep

| | |
|---|-----|
| Exhaust gas mass flow [g/s] | 5.8 |
| Flue gas temperature [°C] | 237 |
| Minimum delivery pressure at nominal heat output [Pa] | 12 |
| at 0.8 times nominal heat output [Pa] | 10 |

Equipment

| | |
|--|-------------|
| Xtra heat storage technology | - |
| Heat Memory System | Accessories |
| External air connection / operation independent of ambient air | Yes |
| Ash removal | Ash box |

- not available