


SLIM 2.0 L + R



www.austroflamm.com

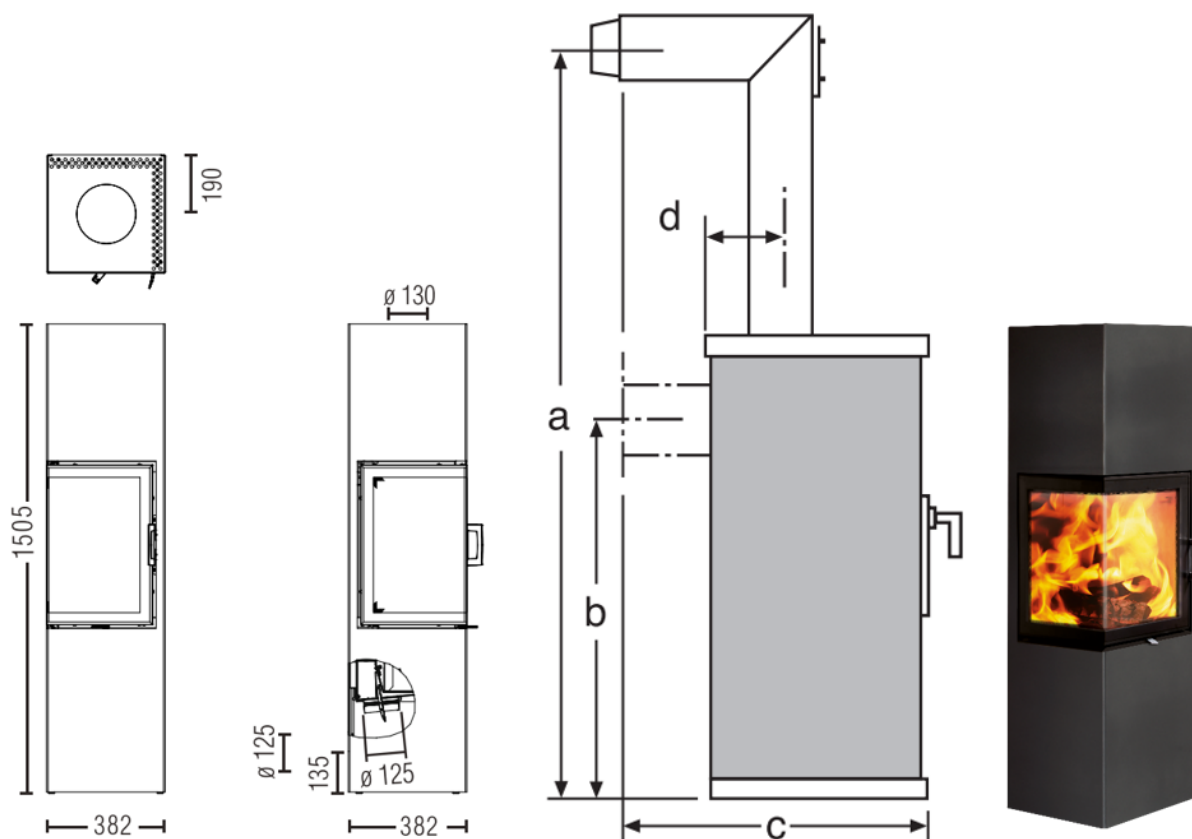

DIMENSIONS AND WEIGHTS

Steel casing (STM) h x w x d [mm]	1505 x 382 x 382
Ceramic casing (KMG) h x w x d [mm]	-
Soapstone casing (SPM) h x w x d [mm]	-
Firebox h x w x d [mm]	550 x 262 x 252
Weight STM [kg]	140
Weight HSM [kg]	60
Flue pipe outlet [mm]	130
Flue pipe connection, middle [mm]	1380
Dimensions a, b, c, d [mm]	2060 / 1380 / 562 / 190
Safety distances to combustibile materials front / side (panel; washer) / rear [mm]	900 / 230; 900 / 230

HEAT OUTPUT

Nominal heat output under EN 13240 [kW]	5
Min. / max. heat output [kW]	3 / 7
Space heating capacity (depending on the building insulation)[m³]	48 - 124
Energy efficiency category	A+

FITTINGS

XTRA heat storage technology	-
Heat Memory System (HMS)	Z
Ash box	o
external air connection / balanced flue operation	rear or bottom

DATA FOR THE CHIMNEY SWEEP

Total flue gas flow, closed [g/s]	5.8
Flue gas temperature, closed [°C]	237
Minimum feed pressure at nominal heat efficiency, closed [Pa]	12
at 0.8 times nominal heat efficiency [Pa]	10