
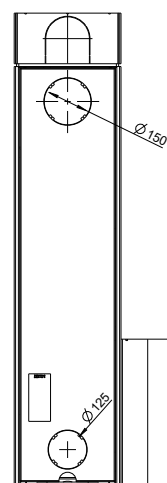
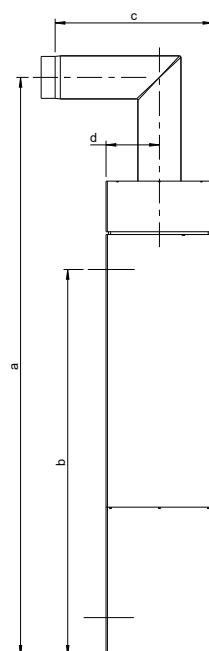
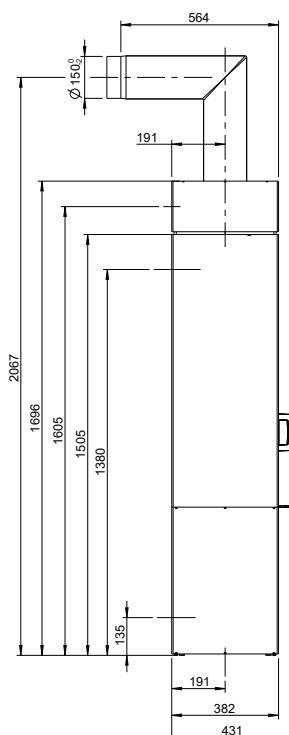
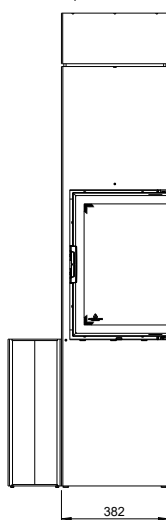
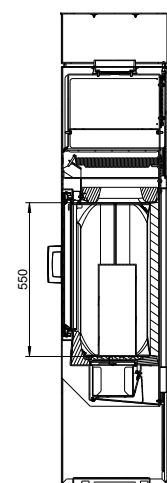



# SLIM 4.0 RIGHT



Dimensions and weight	
Height [mm]	1505
Width [mm]	382
Depth [mm]	382
Combustion chamber width [mm]	253
Combustion chamber height [mm]	550
Combustion chamber depth [mm]	237
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	2067
Dimensions, b (with Austroflamm elbow piece) [mm]	1380
Dimensions, c (with Austroflamm elbow piece) [mm]	564
Dimensions, d (with Austroflamm elbow piece) [mm]	191
Flue pipe outlet, diameter [mm]	150
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	138
Weight Xtra [kg]	-
Weight, HMS [kg]	39
Total weight inc. steel case (STM) [kg]	138
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
Minimum distance to combustible materials - distance to rear dR [mm]	250/ 250
Minimum distance to combustible materials - left side dS_1 [mm]	250/ 250
Minimum distance to combustible materials - right side dS_2 [mm]	1100/ 1100
Minimum distance to adjacent combustible materials (e.g. furniture) dP [mm]	1000/ 1000
Minimum distance to combustible materials - floor in front dF [mm]	0/ 0
Minimum distance to combustible materials - bottom dB [mm]	0/ 0
Minimum distance to combustible materials - left side radiation area dL_1 [mm]	0/ 0
Minimum distance to combustible materials - right side radiation area dL_2 [mm]	400/ 400
Minimum distance to combustible materials - distance to ceiling dC [mm]	750/ 750
Minimum distance from non-flammable materials [mm]	50/ 50
Output	
Nominal heat efficiency [kW]	6.5/ 8.1
Minimum heat output [kW]	-/-
Maximum heat output [kW]	6.5/ 8.1
Minimum room heating capacity [m³]	98/ 120
Maximum room heating capacity [m³]	130/ 160
Energy efficiency class	A/A+
Energy efficiency index (EEI)	105/ 116
Direct heat output [kW]	6.5/ 8.1
Indirect heat output [kW]	-/-
Efficiency at nominal heat output [%]	79.3/ 86.8
Efficiency at at part load heat output [%]	-/-
Data for the chimney sweep	
Flue gas mass flow at nominal heat output [g/s]	6.9/ 6.7
Flue gas temperature [°C]	278/ 235
Minimum delivery pressure at nominal heat output [Pa]	12/ 12
at 0.8 times nominal heat output [Pa]	10/ 10

- not available

# SLIM 4.0 RIGHT

## Equipment

Xtra heat storage technology	-
Heat Memory System	Accessories
External air connection / operation independent of ambient air	-
Ash removal	Ash box