



ROCKET

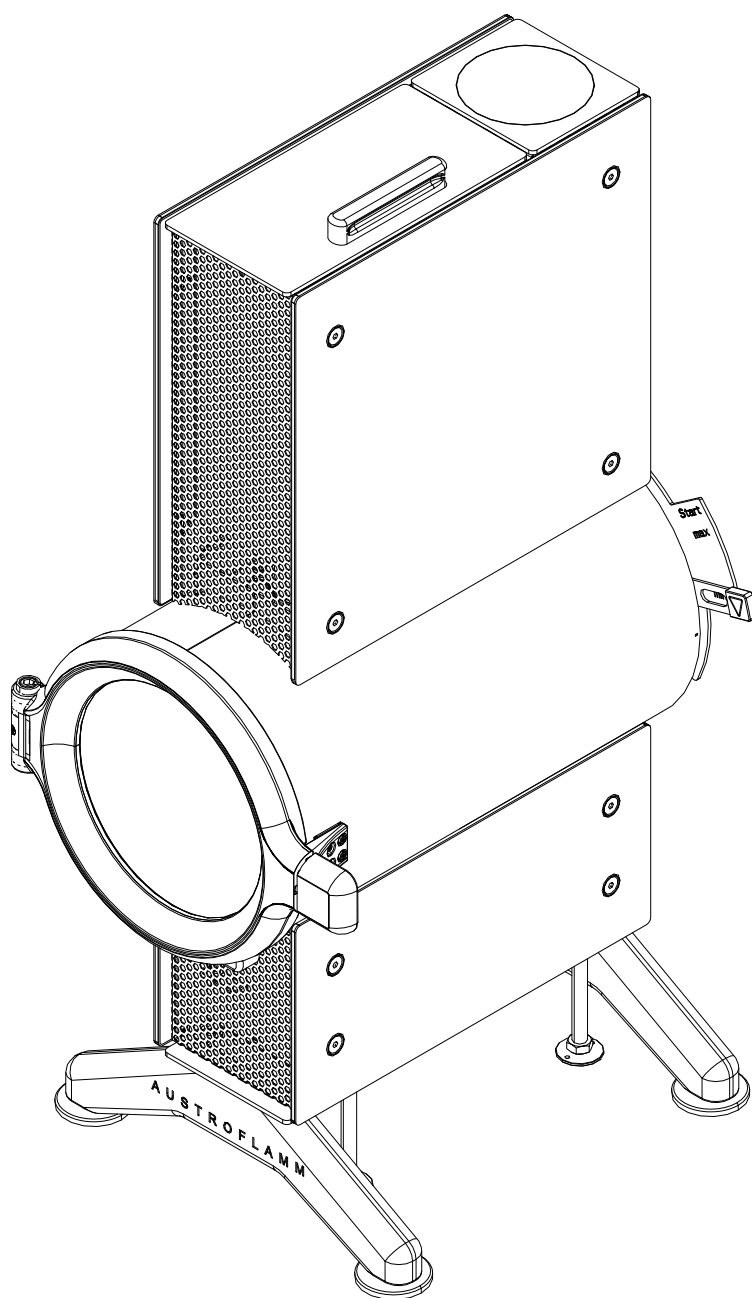

www.austroflamm.com

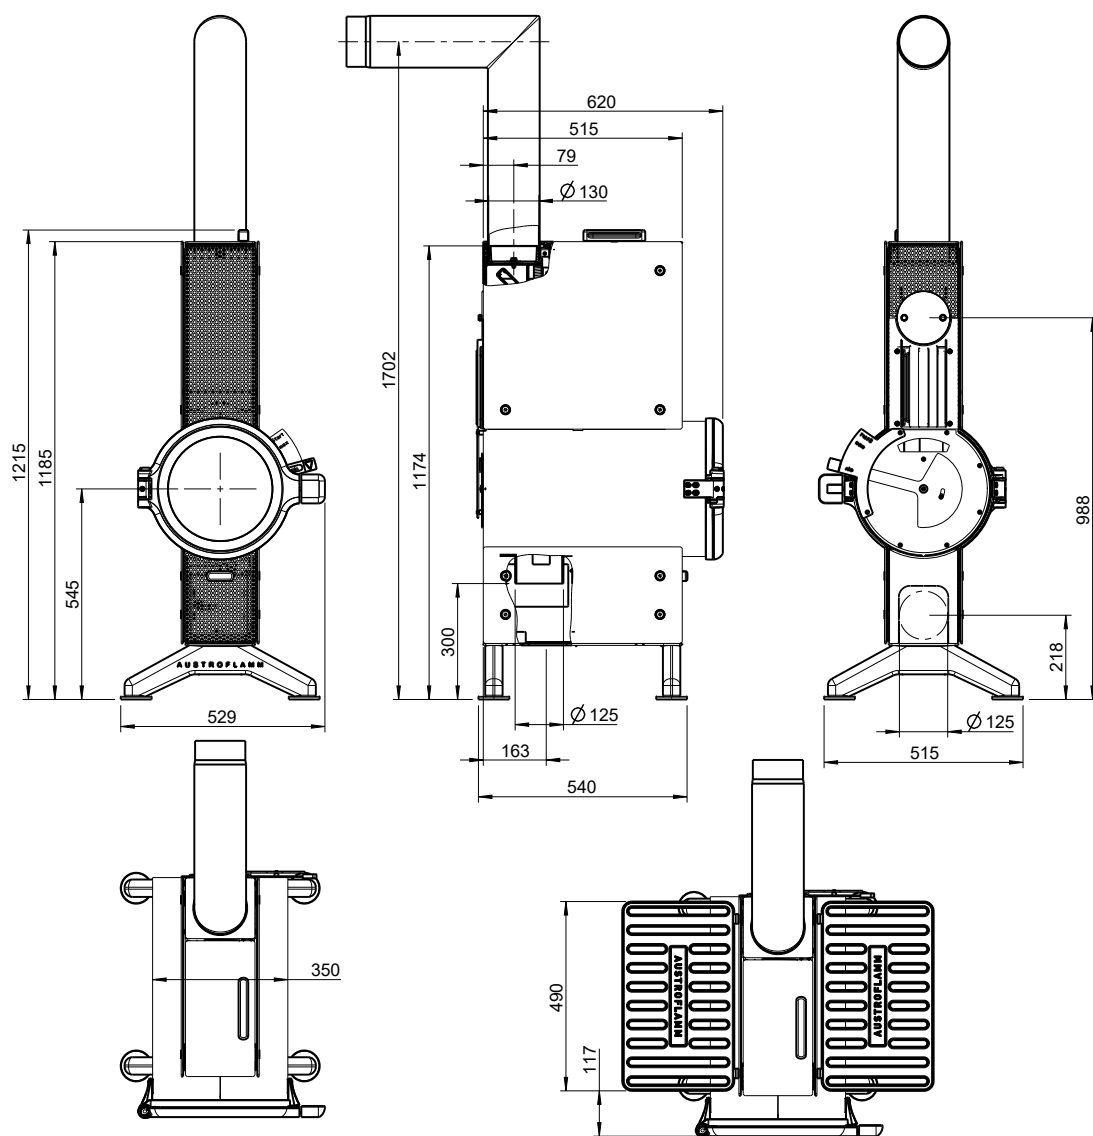

DIMENSIONS AND WEIGHTS

Steel casing (STM) h x w x d [mm]	1215 x 529 x 620
Weight [kg]	148
Flue pipe outlet [mm]	130
Safety distance from non-flammable materials [mm]	50
Safety distances to combustible materials front / side / rear [mm]	700 / 250 / 100

OUTPUT

Nominal heat efficiency as per EN 13240 [kW]	5.0
Heat output min. / max. [kW]	2.5-5.0
Room heating capacity (depending on the building insulation) [m ³]	48 - 124
Energy efficiency class	A+

FITTINGS

XTRA heat storage technology	-
Flat bed firing	o
External air connection / balanced flue operation	

DATA FOR THE CHIMNEY SWEEP

Exhaust gas mass flow closed [g/s]	3.3
Flue gas temperature closed [°C]	176
Minimum delivery pressure at nominal heat output closed [Pa]	12
at 0.8 times nominal heat output [Pa]	10