


CLOU PELLET



www.austroflamm.com

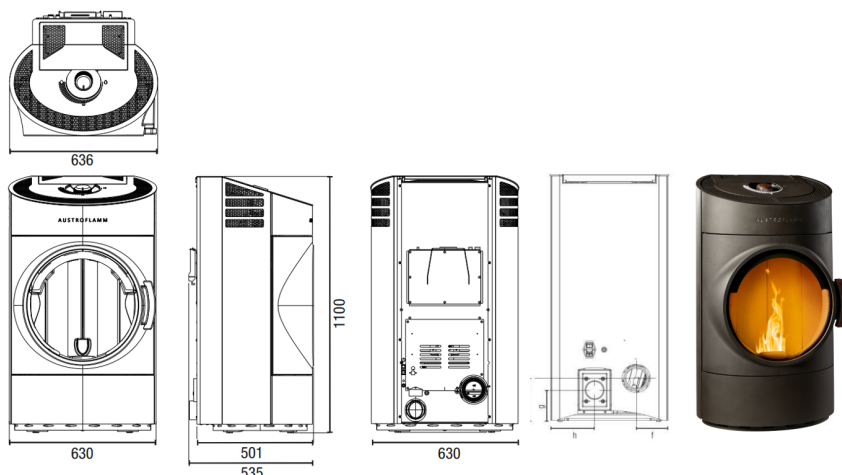

DIMENSIONS AND WEIGHTS

Height [mm]	1100
Width [mm]	630
Depth [mm]	510
Flue outlet diameter [mm]	80
External air connection [Ø mm]	80
Weight [kg]	173
b: Connection height with flue rear [mm]	183
f: Flue connection from right [mm]	191
g: Connection heat external air [mm]	97
h: External air connection from left [mm]	190

HEAT OUTPUT

Nominal heat efficiency [kW] lt. EN 13240	8
Min / max heat output [kW]	2.4-8.0 / 3.0-10.0
Min / max space heating capacity [m³]	98-255
	128-350
Pellet hopper [kg/l]	36/56
Min / max fuel consumption [kg/h]	0.6-1.87
	0.71-2.36
Min / max burning time [h]	19-60
	15-50

FEATURES

Room thermostat	o
(Weekly) timer	-
Automatic grate	-
Independent of ambient air	o
Power connection [V/Hz]	230/50
WLAN	Z
Remote control	-
Convection module	-

DATA FOR THE CHIMNEY SWEEP

Total flue gas flow [g/s] geschlossen	5,51/6,18
Flue gas temperature [°C] geschlossen	200/229
Minimum feed pressure at nominal heat efficiency [Pa] geschlossen	12
Minimum feed pressure for chimney calculation [Pa]	3