
LOUNGE XTRA



LOUNGE XTRA



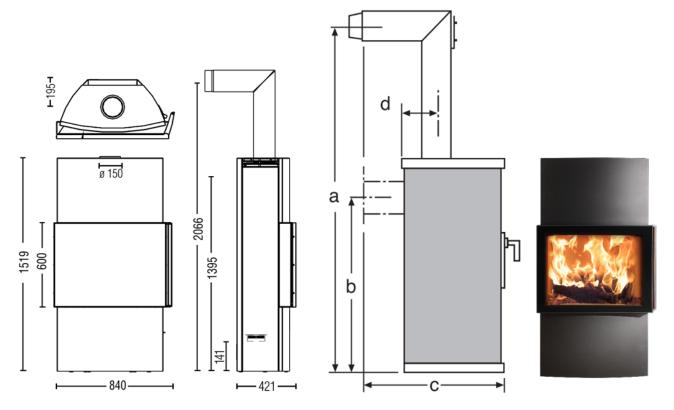

| DIMENSIONS AND WEIGHTS | | |
|-------------------------------------|-----------------|--|
| Height [mm] | 1522 | |
| Width [mm] | 840 | |
| Depth [mm] | 421 | |
| Combustion chamber (h x w x d) [mm] | 445 x 600 x 260 | |
| STM weight [kg] | 338 | |
| Flue outlet diameter [mm] | 150 | |
| Flue outlet diameter, middle [mm] | 1395 | |

| HEAT OUTPUT | |
|---|----------|
| Nominal heat output under EN 13240 [kW] | 8 |
| Min. / max. heat output [kW] | 4 / 11 |
| Space heating capacity (depending on the building insulation)[m³] | 98 - 255 |
| Energy efficiency category | А |

| FEATURES | |
|--|-------------------------|
| XTRA heat-storing technology | 0 |
| Design A1 | 0 |
| Ash drawer / ash box | 0 |
| Dimensions a, b, c, d [mm] | 2066 / 1395 / 599 / 195 |
| external air connection / operation independent of ambient air | o behind or below |

| DATA FOR THE CHIMNEY SWEEP | |
|---|-----|
| Total flue gas flow, closed [g/s] | 6.5 |
| Flue gas temperature, closed [°C] | 330 |
| Minimum feed pressure at nominal heat efficiency, closed [Pa] | 12 |
| at 0.8 times nominal heat efficiency [Pa] | 10 |