


ELISE

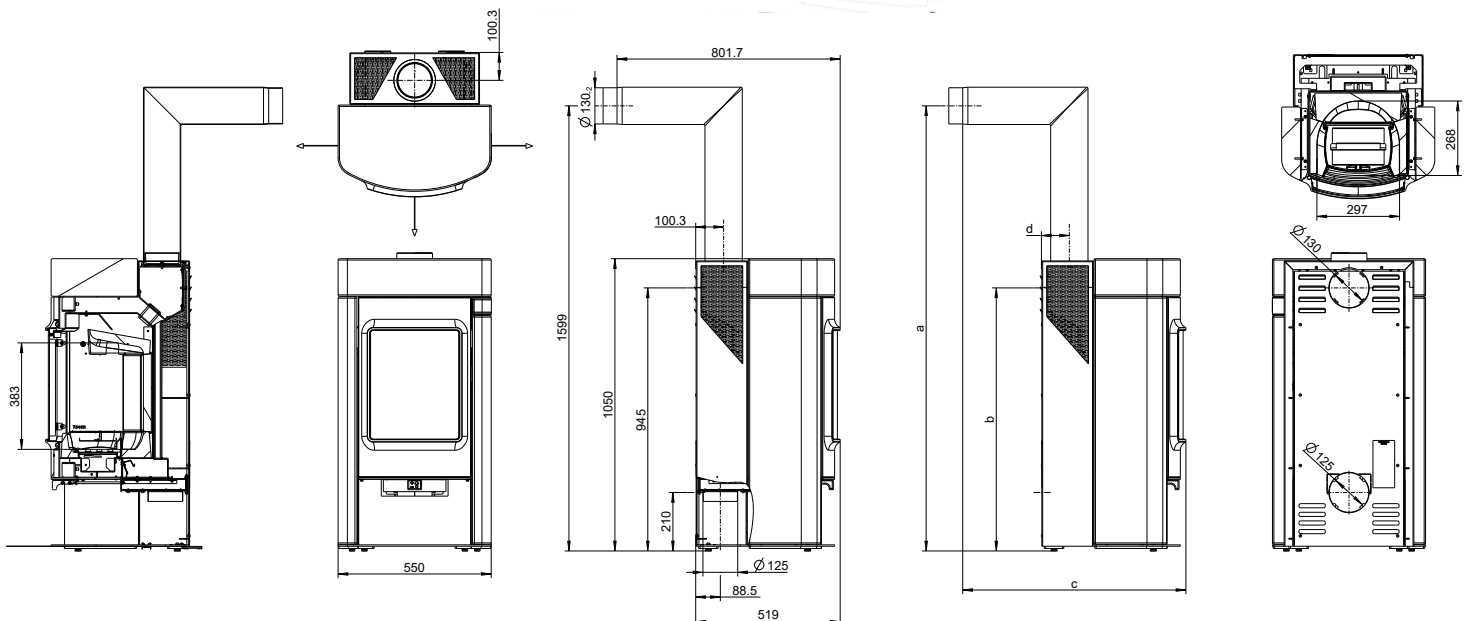

www.austroflamm.com

Dimensions and weight	
Height [mm]	1050
Width [mm]	550
Depth [mm]	519
Combustion chamber width [mm]	297
Combustion chamber height [mm]	383
Combustion chamber depth [mm]	268
Baking compartment width [mm]	-
Baking compartment height [mm]	-
Baking compartment depth [mm]	-
Warming drawer, width [mm]	-
Warming compartment height [mm]	-
Warming drawer, depth [mm]	-
Dimensions, a (with Austroflamm elbow piece) [mm]	1599
Dimensions, b (with Austroflamm elbow piece) [mm]	945
Dimensions, c (with Austroflamm elbow piece) [mm]	801.7
Dimensions, d (with Austroflamm elbow piece) [mm]	100.3
Flue pipe outlet, diameter [mm]	130
Outside air connection diameter [Ø mm]	125
Weight, basic appliance [kg]	255
Weight Xtra [kg]	-
Weight, HMS [kg]	-
Total weight inc. steel case (STM) [kg]	-
Total weight inc. ceramic case (KGM) [kg]	-
Total weight inc. soapstone case (SPM) [kg]	-
dR Distance rear [mm]	250
dS1 Distance left [mm]	250
dS2 Distance right [mm]	250
dP Radiation front [mm]	1300
dF Radiation to the floor [mm]	600
dB Distance bottom [mm]	0
dL 1 Radiation left [mm]	600
dL 2 Radiation right [mm]	600
dC Distance above [mm]	750
Minimum distance from non-flammable materials [mm]	50
Output	
Nominal heat efficiency [kW]	7.0 / 7.2
Minimum heat output [kW]	-
Maximum heat output [kW]	7.0 / 7.2
Minimum room heating capacity [m³]	82
Maximum room heating capacity [m³]	210
Energy efficiency class	A+
Data for the chimney sweep	
Exhaust gas mass flow [g/s]	5.0 / 6.5
Flue gas temperature [°C]	299 / 200
Minimum delivery pressure at nominal heat output [Pa]	12
at 0.8 times nominal heat output [Pa]	10
Equipment	
Xtra heat storage technology	-
Heat Memory System	-
External air connection / operation independent of ambient air	-
Ash removal	Ash box

- not available